

SAFETY WIRING SYSTEM



Distributor Box



8-way distribution box
with electrical feedback
with LED
Replaces identical product (Art.No. 27292)

Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)


Illustration

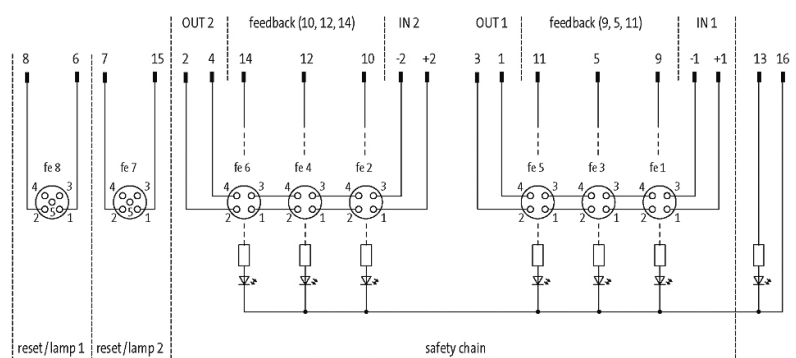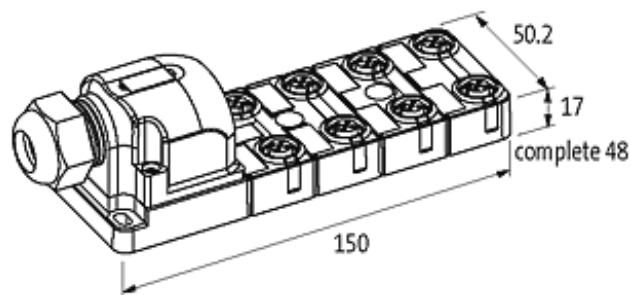

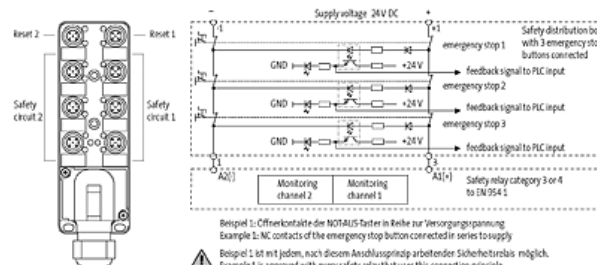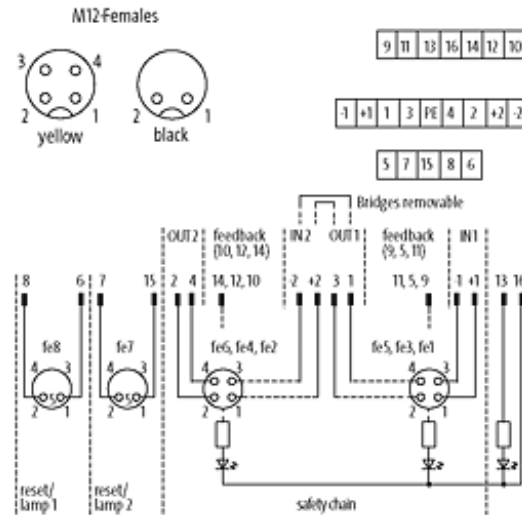


Beispiel 1: Offerkontakte der NOT-AUS-Taster in Reihe zur Versorgungsspannung
Example 1: NC contacts of the emergency stop button connected in series to supply

Beispiel 1 ist mit jedem, nach diesem Anschlussprinzip arbeitenden Sicherheitsrelais möglich.
Example 1 is approved with every safety relay that uses this connection principle.

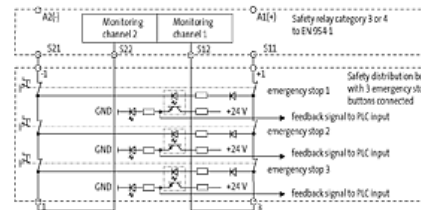


Beispiel 2: Offerkontakte der NOT-AUS-Taster in separatem Sicherheitskreis
Example 2: NC contacts of the emergency stop button connected to the safety circuit

Beispiel 2 ist nur erlaubt mit dem Sicherheitsrelais MIRO SAFE SWITCH HCS (Murrelektronik GmbH) und dem Sicherheitsrelais SAFE 4 (Fa. Riese electronic GmbH). Andere Sicherheitsrelais sind nicht freigegeben.
Example 2 is only allowed with the safety relays MIRO SAFE SWITCH HCS (Murrelektronik GmbH) and SAFE 4 (Riese electronic GmbH).

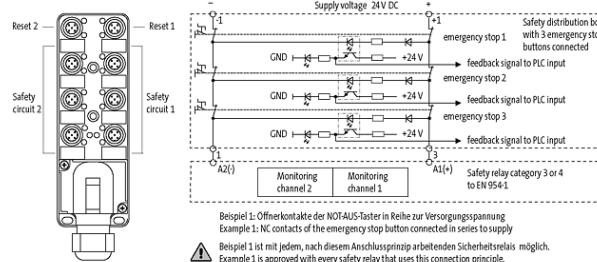

Beispiel 1: Offerkontakte der NOT-AUS-Taster in Reihe zur Versorgungsspannung
Example 1: NC contacts of the emergency stop button connected in series to supply

Beispiel 1 ist mit jedem, nach diesem Anschlussprinzip arbeitenden Sicherheitsrelais möglich.
Example 1 is approved with every safety relay that uses this connection principle.

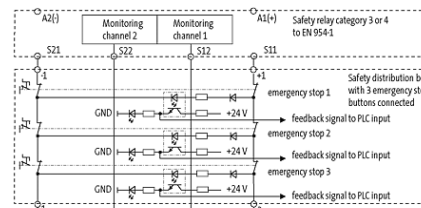

Beispiel 2: Offerkontakte der NOT-AUS-Taster in separatem Sicherheitskreis
Example 2: NC contacts of the emergency stop button connected to the safety circuit

Beispiel 2 ist nur erlaubt mit dem Sicherheitsrelais MIRO SAFE SWITCH HCS (Murrelektronik GmbH) und dem Sicherheitsrelais SAFE 4 (Fa. Riese electronic GmbH). Andere Sicherheitsrelais sind nicht freigegeben.
Example 2 is only allowed with the safety relays MIRO SAFE SWITCH HCS (Murrelektronik GmbH) and SAFE 4 (Riese electronic GmbH).

Product may differ from Image

Contact layout

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 07/17

Murrelektronik GmbH | Falkenstraße 3 | 71570 Oppenweiler | Fon +49 (71 91) 47-0 | Fax +49 (71 91) 47-491000 | shop@murrelektronik.com | shop.murrelektronik.com

PIN 1	MSDS: 11 (yellow), 13 (black); EMERGENCY-STOP: 11 (black)
PIN 2	MSDS: 12 (yellow), 14 (black); EMERGENCY-STOP: 12 (black)
PIN 3	MSDS: 21 (yellow); EMERGENCY-STOP: 21 (black)
PIN 4	MSDS: 22 (yellow); EMERGENCY-STOP: 22 (black)
LED display	LED (green): Power / LED (yellow): Emergency Stop

Technical Data

Operating voltage	24 V DC (EN 61131-2)
Operating current (chain)	max. per 1 A
Operating current (black females)	max. per 1 A
Material group	EN 60664-1 over voltage, category III
Isolation resistance	min. 1000 MOhm
Locking of ports	Screw thread M12 × 1 mm

General data

Protection	IP54
Connection	Screw plug-in terminal
Temperature range	-20...+80 °C

Commercial data

country of origin	DE
customs tariff number	85369010
EAN	4048879353373
eClass	27049002
minimum order quantity	1