



48 mm



Matsushita
Programmable Controller FP-e



FP-e Series

The universal compact PLC

Do this, do that, do everything. **All in One!**



3-color Display


Simple characters and numerical values can be displayed. Simple messages as well as timer/counter settings and elapsed values can also be displayed.

Built-in operation switch

Setting values can be changed. The operation switch can also be used as an input.

Compact

Panel mountable, little space is taken up on the control panel. The size is only 48 × 70 mm (behind faceplate).



Matches FP0 intelligence (equivalent to FP0-C14)

Panel mounted type (in accordance with IP66, IEC standard)

To match panel design, a black faceplate is available.



Same programming tools used as with the FP Series

One programming software for all PLC types

Programming software and cables are common for all FP Series PLCs, so that any program created for the FP Series can be used by the FP-e as well. FPCWIN Pro Ver.5 and FPCWIN GR from Ver.2.3 offer a dialog to configure the screen display of the FP-e easily. You can check the result of the configuration directly with the display in the dialog.




FP-e Series

Optimised for a wide range of applications


Equipped with RS485 and RS232C interfaces

● Up to 99 computer link stations are possible with RS485. (RS485 type)

Up to 32 computer link stations are possible using a C-NET adaptor and up to 99 are possible using a commercially available adaptor. You can easily monitor operation status or perform control.

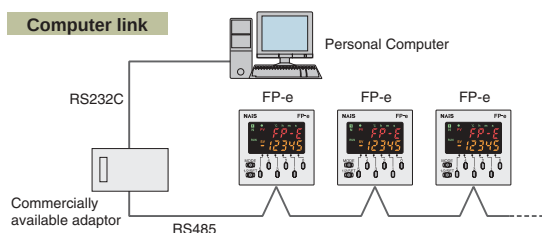


● With RS232C, communication with up to two ports is possible. (RS232C type)

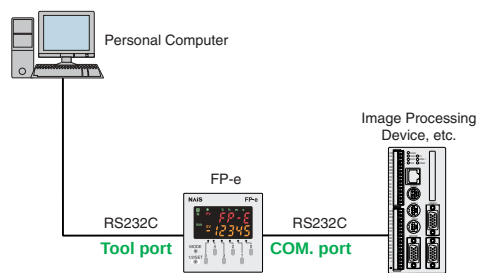

Can even handle temperature control


● Two-point K-type thermocouple (-30 to 300°C) connection is possible. (equipped with thermocouple input)

Can be used in place of a temperature controller or used to control them.

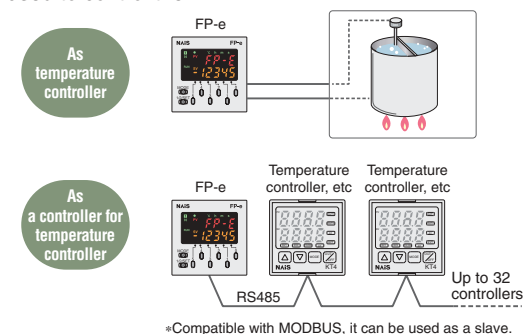

● PID instruction function


High-performance temperature control can be achieved with PID instruction.

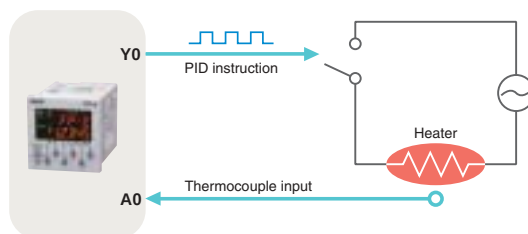

Equipped with high-speed counter for support of 2-axis independent positioning

● Pulse output function


The unit comes equipped with 2 channels for pulse output of up to 10 kHz pulses. Since these two channels can be separately controlled, the FP-e is also suitable for 2-axis independent positioning.

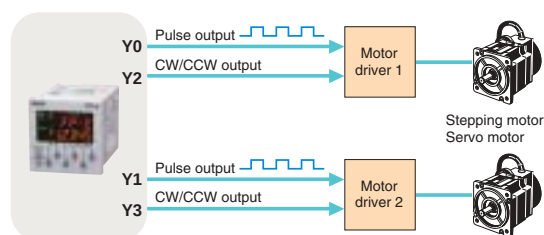

● High-speed counter function

In single phase, the 4-channel total is 10 kHz, and in 2-phase the 2-channel total is 2 kHz total speed, making the FP-e suitable for inverter control, etc.

(One half for the type with thermocouple input.)

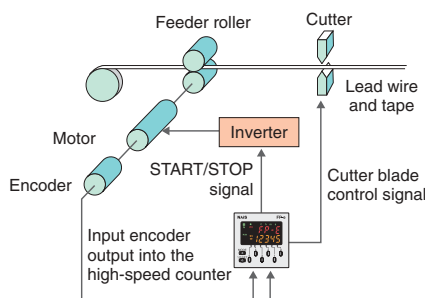



FP-e Control Units

Decisive advantages in its class

FP-e Control Unit

New Age, Advanced Controller!

Timer, Counter, Hour Meter, Temperature Controller and PLC in one Unit



■ Features

1. 5-character, 2-line, 3-color Display

Simple characters and numerical values can be displayed. Simple error messages as well as operation instructions and timer/counter set values can be displayed.

2. Front Operation Switch

Timer/Counter set values can be changed using front operation switches. The switches can also be used as input switches (X30 to X3F), so you need not install external switches.

3. Equivalent to FP0-C14 Intelligence of Small PLCs

In addition to the functions of programmable controller FP0, pulse output and high-speed counter functions can be used. The unit comes equipped with a tool port, and COM. port (RS232C/RS485) for communication.

4. Easy Programming Using Wizard

Screen display instructions can be easily created using a programming tool wizard in FPGWIN GR Ver. 2.3. or FPGWIN Pro Ver. 5.0.

5. Smooth Debugging

Monitoring memory area data and the I/O status facilitates debugging using the R (register) and I (I/O monitor) display modes.

6. Panel Mounted Type

The front of a unit is water-proof (in accordance with IP66, IEC standard).


■ Type

Name	Type	Calendar timer	Thermocouple input	COM. port	Product No.
FP-e control unit	Standard type (RS232C)	Not available	Not available	RS232C	AFPE224300
	Calendar timer type (RS232C)	Available	Not available	RS232C	AFPE224305
	Thermocouple input type (RS232C)	Available	Available	RS232C	AFPE214325
	Standard type (RS485)	Not available	Not available	RS485	AFPE224302
	Thermocouple input type (RS485)	Not available	Available	RS485	AFPE214322

■ Display modes and functions

1


N mode (Normal mode)



Displays characters and numerical values, numerical data can be changed.

2


S mode (Switch mode)



Can also display characters and numerical values. Operation switches can be used as inputs.

3


R mode (Register mode)



Operation memory in the controller can be monitored and its data changed.

4

I mode (I/O monitor mode)



I/O status (X, Y) in the controller can be monitored.

FP-e Series

Specification table

■ Performance specifications

Model			AFPE224300 Standard type (RS232C)	AFPE224302 Standard type (RS485)	AFPE224305 Calendar timer type (RS232C)	AFPE214325 Thermocouple input type (RS232C)	AFPE214322 Thermocouple input type (RS485)		
Item									
Programming method/Control method			Relay symbol/Cyclic operation						
Number of controllable I/O points		Control unit	14 points [Input: 8, Output: 6 (Tr. NPN: 5/Ry: 1)]			12 points [Input: 6, Output: 6 (Tr. NPN: 5/Ry: 1)]			
		Front switch input	8 points						
Program memory		Built-in memory	Built-in EEPROM						
Program capacity			2,720 steps						
Number of instruction		Basic	83						
		High-level	117						
Operation speed			0.9 μs/step (Basic instruction)						
I/O update and Base time			Typical 2 ms						
Operation memory points	Relays	Internal relay (R)	1,008 points (R0 to R62F)						
		Special internal relay (R)	64 points (R9000 to R903F)						
		Timer/Counter (T/C)	144 points (Initial setting: 100 timer points, T0 to T99/44 counter points, C100 to C143 ^{Note 1)} Timer range (1 ms, 10 ms, 100 ms, 1 s): selected by instruction						
	Memory areas	Data register (DT)	1,660 words (DT0 to DT1659)						
		Special data register (DT)	112 words (DT9000 to DT9111)						
		Index registers (IX, IY)	2 points						
		Differential points	Unlimited number of points						
Master control relay points (MCR)		32 points							
Number of labels (JP and LOOP)		64 labels							
Number of step ladders		128 stages							
Number of subroutines		16 subroutines							
Number of interrupt programs		7 programs (external: 6, internal 1)							
Self-diagnostic function		Watchdog timer, program syntax check, etc.							
Clock/calendar function ^{Note 2)}		Not available			Available (year, month, day, hour, minute, second and day of week). However, this can only be used when a battery has been installed.			Not available	
Battery life		Not available			220 days or more (actual usage value: approx. 870 days (25°C). (Periodic replacement interval: 1 year). (Value applies when no power is supplied at all.)			Not available	
Pulse catch input		6 points in total (X0 and X1: 50 μs, X2 to X5: 100 μs)							
Interrupt input									
COM. port ^{Note 3)}		RS232C		RS485	RS232C			RS232C	RS485
Periodical interrupt		0.5 ms to 30 s							
Constant scan		Available							
Password		Available							
Special functions	High-speed counter function * The combinations 1-phase × 2 ch. and 2-phase × 1 ch. are also possible for the high-speed counter.		Counter mode: Addition/subtraction (1-phase) ^{Note 4)} - Input points: 4 ch. (Max.)						
			- Max. speed: 10 kHz (total of 4 ch.) : 5 kHz (total of 4ch.)						
			- Input contact: X0: count input (ch. 0), X1: count input (ch. 1), X2: reset input ^{Note 5)} X3: count input (ch. 2), X4: count input (ch. 3), X5: reset input ^{Note 5)}						
			- Min. input pulse width: X0 and X1: 50 μs (10 kHz) X0 and X1: 100 μs (5 kHz) X3 and X4: 100 μs (5kHz)						
			Counter mode: 2-phase/individual/direction decision (2-phase) - Input points: 2 ch (Max.)						
			- Max. speed: 2 kHz (total of 2 ch.) : 1 kHz (total of 2ch.)						
			- Input contact: X0: count input (ch. 0), X1: count input (ch. 0), X2: reset input X3: count input (ch. 2), X4: count input (ch. 2), X5: reset input						
	- Min. input pulse width: X0 and X1: 50 μs (10 kHz) X0 and X1: 100 μs (5 kHz) X3 and X4: 100 μs (5 kHz)								
	Pulse output function		Output points		2 independent points (Y0 and Y1) (No interpolation function)				
			Output frequency		40 Hz to 10 kHz (Y0/Y1: 1-point) ^{Note 6)} 40 Hz to 5 kHz (Y0/Y1: 2-point)				
	PWM output function		Output points		2 points (Y0 and Y1)				
Output frequency			Frequency: 0. 15 Hz to 1 kHz Duty: 0.1 % to 99.9 %						
Memory backup ^{Note 7)}	Timer		Non-hold type: (all points)						
	Counter	Non-hold type	From set value to C139						
	Counter	Hold type	4 points (elapsed values) C140 to C143						
	Internal relay	Non-hold type	976 points (R0 to R60F)		61 words (WR0 to WR60)				
		Hold type	32 points (R610 to R62F)		2 words (WR61 to WR62)				
	Data register	Non-hold type	1,652 words (DT0 to DT1651)						
		Hold type	8 words (DT1652 to DT1659)						

Note 1) The proportion of timer points to counter points can be changed using a system register.

Note 2) Precision of calendar timer:

- At 0°C/32°F, less than 200 seconds of error per month
- At 25°C/77°F, less than 70 seconds of error per month
- At 55°C/131°F, less than 240 seconds of error per month

Note 3) When using the COM. port for communication, retransmission is recommended.

The RS232C driver IC for the COM. port conforms completely to EIA/TIA-232E and CCITT V.28 standards

Note 4) The max. counting speed (10 kHz) is the counting speed with a rated input voltage of 24 V DC and an ambient temperature of 25°C. The counting speed (frequency) will decrease depending on the voltage and temperature.

Note 5) If the unit is equipped with both reset inputs X0 and X1, X2 serves as the reset input for X1. If X3 and X4 are used, X5 serves as the reset input for X4.

Note 6) When the positioning control instruction "F168" is performed, the maximum output frequency is 9.5 kHz.

Note 7) The program, system registers and the hold type area (internal relay, data register, and timer/counter) are backed up by the built-in EEPROM.

When a battery is replaced with a new one in the FP-e unit with a calendar timer function, settings can be changed without installing a battery. The data cannot be stored even when the settings are changed using the system register.

Note 8) F180 (SCR) and F181 (DSP) instructions are supported from Control FFWIN GR Ver. 2.2. and FFWIN Pro V 4.1.



FP-e Series

Technical data

General specifications

Item	Description			
Rated voltage	24 V DC			
Operating voltage range	21.6 to 26.4 V DC			
Allowed momentary power off time	10 ms			
Ambient temperature	0 to +55°C			
Storage temperature	−20 to +70°C			
Ambient humidity	30 to 85%RH (non-condensing)			
Storage humidity	30 to 85%RH (non-condensing)			
Breakdown voltage	Input terminals (COM, X0 to Xn) Output terminals (Y0 to Y4)	↔	Power supply terminal, Function earth Input terminal (A0, A1) COM. (RS232C) terminal	500 V AC for 1 minute
	Output terminal (Y5)	↔	Power supply terminal, Function earth Input terminal (COM, X0 to Xn, A0, A1) COM. (RS232C) terminal	1500 V AC for 1 minute
	Input terminals (COM, X0 to Xn)	↔	Output terminals (Y0 to Y4)	500 V AC for 1 minute
Insulation resistance	Input terminals (COM, X0 to Xn) Output terminals (Y0 to Y5)	↔	Power supply terminal, Function earth Input terminal (A0, A1) COM. (RS232C) terminal	Min. 100 M (measured with 500 V DC)
	Input terminals (COM, X0 to Xn)	↔	Output terminals (Y0 to Y5)	
Vibration resistance	10 to 55 Hz, 1 cycle/min. Double amplitude: 0.75 mm, 10 min. on X, Y, and Z axes			
Shock resistance	98 m/s ² or more, 4 times on X, Y, and Z axes			
Noise resistance	1000V (p-p) with pulse widths 50 ns and 1 μs (based on in-house measurements)			
Operating condition	Free from corrosive gases and excessive dust			
Current consumption	200 mA or less (24 V DC)			
Protection	IP66-compliant front section (Only when a rubber packing is used.)			
Mass	Approx. 130 g			

DC input specifications (X0 to X7)

Item	Description	
Number of input	8 points (6 points for thermocouple input type)	
Insulation method	Optical coupler	
Rated input voltage	24 V DC	
Operating voltage range	21.6 to 26.4 V DC	
Rated input current	Approx. 4.3 mA	
Input points per common	8 points/common (6 points/common for thermocouple input type) Either the positive or negative of the input power supply can be connected to common terminal.	
ON voltage/ON current	19.2 V or less/4 mA or less	
OFF voltage/OFF current	2.4 V or more/1 mA or more	
Input impedance	Approx. 5.1 k (X0, X1) Approx. 5.6 k (X2 to X7)	
Response time	OFF to ON	50 μs or less (X0, X1) ^{Note 1)}
		100 μs or less (X2 to X5) ^{Note 1)}
		2 ms or less (X6, X7)
	ON to OFF	50 μs or less (X0, X1) ^{Note 1)}
		100 μs or less (X2 to X5) ^{Note 1)}
		2 ms or less (X6, X7)
Operating mode indicator	LCD display (I/O monitor mode)	

Note 1) X0 through X5 are inputs for the high-speed counter and have a fast response time. If used as normal inputs, you should insert a timer in the program as chattering and noise may be interpreted as an input signal.
Also, the above specifications apply when the rated input voltage is 24V DC and the temperature is 25°C.

Thermocouple input specifications

Item	Description
Number of input	2 points (CH0: WX1, CH1: WX2)
Temperature sensor type	Thermocouple type K
Input range	-30.0 to 300.0°C ^{*1)} (-22 to 572°F)
Accuracy	±0.5%FS±1.5°C (FS = -30 to 300°C)
Resolution	0.1°C
Conversion time	250 ms/2CH ^{*2)}
Insulation method	Between internal circuit and thermocouple input circuit: noninsulated ^{*3)} Between CH0 and CH1 of thermocouple input: PhotoMOS insulation
Detection function of wire disconnection	Available

*1) Temperature can be measured up to 330°C (626°F). When the measured temperature exceeds 330°C (626°F) or the thermocouple wiring is disconnected, "K20000" is written to the register.

*2) Temperature conversion for thermocouple input is performed every 250 ms. The conversion data is updated on the internal data register after the scan is completed.

*3) The internal circuit and thermocouple input circuit are not insulated. Therefore, use the nongrounding type thermocouples and sheath tubes.

FP-e Series

Technical data

■ Transistor NPN output specifications (For Y0 to Y4)

Item	Description
Insulation method	Optical coupler
Output type	Open collector
Rated load voltage	5 to 24 V DC
Operating load voltage range	4.75 to 26.4 V DC
Max. load current	0.5 A
Max. surge current	1 A
Output points per common	5 points/common
OFF state leakage current	100 μ A or less
ON state voltage drop	1.5 V or less
Response time	OFF to ON 50 μ s or less (For Y0 and Y1), 1 ms or less (For Y2, Y3 and Y4)
	ON to OFF 50 μ s or less (For Y0 and Y1), 1 ms or less (For Y2, Y3 and Y4)
External power supply (For driving internal circuit)	Voltage 21.6 to 26.4 V DC
	Current 6 mA/point (For Y0 and Y1) 3 mA/point (For Y2, Y3, and Y4)
Surge absorber	Zener diode
Operating indicator	LCD display (I/O monitor mode)


■ Relay output specifications (Y5)

Item	Description
Output type	Normally open (1 Form A)
Rated control capacity	2 A 250 V AC, 2 A 30 V DC
Output points per common	1 point/common
Response time	OFF to ON Approx. 10 ms
	ON to OFF Approx. 8 ms
Life time	Mechanical Min. 2×10^7 operations
	Electrical Min. 10^5 operations (resistive load)
Surge absorber	None
Operating indicator	LCD display (I/O monitor mode)

■ COM. port communication specifications *1)


Item	Description
COM. port type	RS232C *2) RS485
Isolation status with the internal circuit	Non-isolated Isolated
Transmission distance	15 m 1200 m
Baud rate *3)	300, 600, 1200, 2400, 4800, 9600, 19200 bit/s
Communication method	Half-duplex
Synchro system	Synchronous communication method
Transmission format	Stop bit: 1 bit/2 bit
	Parity: Not available/Available (Odd number/Even number)
	Data length 7 bit/8 bit
	Beginning code: STX available/STX not available
Data output order	Ending code: CR/CR+LF/not available/ETX
	Starting from 0 bits per character
No. of connected units	— 99 *5) *6)
Communication mode	- General-purpose communication - Computer link

- *1) When communicating between FP-e and other devices, it is recommended to perform resend processing.
 *2) For RS232C wiring, be sure to use shielded wires for higher noise immunity.
 *3) Set the baud rate of RS485 with the FP-e system register and FP-e internal switch.
 Set the baud rate of RS232C with the FP-e system register.
 *4) When sending a command from the FP-e is completed in RS485 communication, send a response from the receiving device to the FP-e after the following time has elapsed:
 9600 bit/s: 2 ms or longer 19200 bit/s: 1 ms or longer
 It takes at least 1 scan time (at least 2 ms) for the FP-e to send back a response after received the command.
 *5) When our C-NET Adapter or RS485 device other than recommended is connected in the system, the maximum connection number is limited to 32 units.
 *6) For a RS485 converter on the computer side, SI-35 (from LINE EYE Co., Ltd.) is recommended.
 When SI-35 is used in the system, up to 99 units can be connected.




■ Dimensions

(mm)

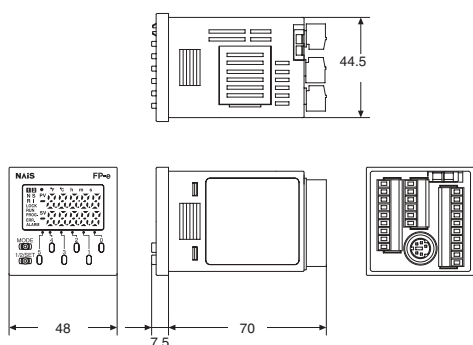


■ Wiring diagram




● Input connector (Standard type)




(Thermocouple input type)




● Output connector



● Power supply/COM. port connector (RS232C type)




(RS485 type)



FP-e options


Options



Backup battery

Included with calendar timer type


Part No.: **AFPG804**



Rubber gasket

Included with unit


Part No.: **ATC18002**



Mounting frame

Included with unit

Part No.: **AT8-DA4**



Panel cover


Color: Black

Part No.: **AFPE803** (20 sets)



Protective cover


Part No.: **AQM4803**



Terminal socket set

4 type sockets, additional part

Part No.: **AFPE804**



Programming tool software

Programming tool software

Control FPWIN Pro

Part No.: FPWINPROSEN5

(Small version, English manual)

FPWINPROSFR5

(Small version, French manual)

FPWINPROSDE5

(Small version, German manual)

FPWINPROFEN5

(Full version, English manual)

FPWINPROFFR5

(Full version, French manual)

FPWINPROFDE5

(Full version, German manual)

Control FPWIN GR

Part No.: FPWINGRF2 (Full version)

Programming cable

Part No.: **AFC8513**

Matsushita Electric Works

Please contact our Global Sales Companies in:

Europe

▶ Europe	Matsushita Electric Works (Europe) AG	Rudolf-Diesel-Ring 2, D-83607 Holzkirchen, Tel. (08024) 648-0, Fax (08024) 648-111, www.mew-europe.com
▶ Austria	Matsushita Electric Works Austria GmbH	Josef Madersperger Straße 2, A-2362 Biedermannsdorf, Tel. (0 22 36) 2 68 46, Fax (0 22 36) 4 61 33, www.matsushita.at
▶ Benelux	Matsushita Electric Works Benelux B.V.	De Rijn 4, (Postbus 211), 5684 PJ Best, (5680 AE Best), Netherlands, Tel. (0499) 372727, Fax (0499) 372185, www.matsushita.nl or www.matsushita.be
▶ France	Matsushita Electric Works France S.A.R.L.	B.P. 44, F-91371 Verrières le Buisson CEDEX, Tél. 01 60135757, Fax 01 60135758, www.matsushita-france.fr
▶ Germany	Matsushita Electric Works Deutschland GmbH	Rudolf-Diesel-Ring 2, D-83607 Holzkirchen, Tel. (08024) 648-0, Fax (08024) 648-555, www.matsushita.de
▶ Ireland	Matsushita Electric Works UK Ltd.	Irish Branch Office, Waverley, Old Naas Road, Bluebell, Dublin 12, Republic of Ireland, Tel: (01) 4600969, Fax: (01) 4601131, www.matsushita.ie
▶ Italy	Matsushita Electric Works Italia s.r.l.	Via del Commercio 3-5 (Z.I. Fertina), I-37012 Bussolengo (VR), Tel. (045) 6752711, Fax (045) 6700444, www.matsushita.it
▶ Portugal	Matsushita Electric Works España S.A.	Portuguese Branch Office, Avda 25 de Abril, Edificio Alvorada 5ºE, 2750-512 Cascais, Portugal, Tel. (21) 4828266, Fax (21) 4827421
▶ Scandinavia	Matsushita Electric Works Scandinavia AB	Sjöängsvägen 10, 19272 Sollentuna, Sweden, Tel. (08) 59476680, Fax (08) 59476690, www.matsushita.se
▶ Spain	Matsushita Electric Works España S.A.	Parque Empresarial Barajas, San Severo 20, 28042 Madrid, Tel. (91) 3293875, Fax (91) 3292976, www.matsushita.es
▶ Switzerland	Matsushita Electric Works Schweiz AG	Grundstrasse 8, CH-6343 Rotkreuz, Tel. (041) 7997050, Fax (041) 7997055, www.matsushita.ch
▶ United Kingdom	Matsushita Electric Works UK Ltd.	Sunrise Parkway, Linford Wood East, Milton Keynes, MK14 6LF, England, Tel. (01908) 231555, Fax (01908) 231599, www.matsushita.co.uk

North & South America

▶ USA	Aromat Corporation Head Office USA	629 Central Avenue, New Providence, N.J. 07974, Tel. 1-908-464-3550, Fax 1-908-464-8513, www.aromat.com
-------	---	---

Asia

▶ China	Matsushita Electric Works Ltd. China Office	2013, Beijing Fortune, Building No. 5, Dong San Huan Bei Lu, Chaoyang District, Beijing, Tel. 86-10-6590-8646, Fax 86-10-6590-8647
▶ Hong Kong	Matsushita Electric Works Ltd. Hong Kong	Rm1601, 16/F, Tower 2, The Gateway, 25 Canton Road, Tsimshatsui, Kowloon, Hong Kong, Tel. (852) 2956-3118, Fax (852) 2956-0398
▶ Japan	Matsushita Electric Works Ltd.	1048 Kadoma, Kadoma-shi, Osaka 571-8686, Japan, Tel. 06-6908-1050, Fax 06-6908-5781, www.mew.co.jp/e-acg/
▶ Singapore	Matsushita Electric Works (Asia Pacific) Pte. Ltd.	101 Thomson Road, #25-03/05, United Square, Singapore 307591, Tel. (65) 6255-5473, Fax (65) 6253-5689