

MSUD valve form BI 11mm with cable PUR-IZ 3x0,75 grey drag chain 1,5m

Form BI (11 mm) industrial standard
 0...230 V AC/DC, without components
 0°, PE at cable outlet

Image**Approvals****Form**

11061

Technical Data

Operating voltage	0...230 V AC/DC
Hold current (40 °C)	max. 10 A
Housing	Plastic, black (gray on request)
Temperature range	-25...+85 °C, depending on cable quality

Cable

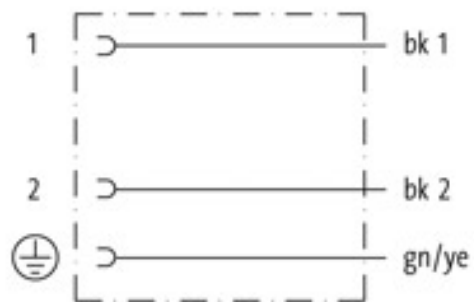
No. and diameter of wires	3 x 0.75 mm ²
Wire isolation	PVC (bk, num, gnye)
Suitable for use in C-tracks	yes
Jacket	PUR/PVC
Outer diameter	approx. 5.9 mm
Bend radius (mobile)	10 x outer diameter
Temperature range (fixed)	-30...+70 °C
Temperature range (mobile)	-5...+70 °C

Commercial data

Gross weight	106,000
Net weight	106,000
Weight unit	Gramm
Basic unit	ST
Customs tariff number	85444290
Unit (piece)	1,000
Limited value	1,000

Comments

Further cable lengths on request.
 Plastic housings with good resistance against chemicals and oils.
 The resistance to aggressive media should be individually tested for your application. Further details on request.

Circuit diagram**Contact layout**