

MVP12, 6xM12, 4pole, pluggable cable 10.0m PUR/PVC 6x0,34+3x0,75

6-way, 4-pole

PUR/PVC

10.0 m

Image



Approvals



Contact layout

Contact 1	(+)
Contact 3	(-)
Contact 4	(N/O)/(S1)
Contact 5	(Earth)
LED display	LED (green): Power LED (yellow): signal (S1)

Technical Data

Operating voltage	24 V DC
Signal per port	1
Operating current per contact (40 °C)	max. 4 A
Total current	max. 8 A

Technical data M12 port

Locking of ports	Screw thread M12 × 1 mm
------------------	-------------------------

All data on this data sheet was compiled carefully.

Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 04/11


Murrelektronik GmbH | Falkenstraße 3, D-71570 Oppenweiler | Fon +49 7191 47-0, Fax +49 7191 47-130 | info@murrelektronik.com | www.murrelektronik.com

Cable		
No./diameter of wires	6 × 0.34 + 3 × 0.75 mm ²	
Jacket	PUR/PVC	
Outer diameter	approx. 9.1 mm	
Bend radius (mobile)	12 × outer diameter	
Bend cycles	2 Mio.	
Cable number	335	
General data		
Housing	Plastic, flame retardant	
Protection	IP65, IP67	
Temperature range	-20...+80 °C	
Commercial data		
Gross weight	1460	
Net weight	1460	
Weight unit	gram	
Basic unit	pc.	
Customs tariff number	85369010	
Unit (piece)	1	
Limited value	1	
Accessories		Art.-No.
	M12 plastic lock screw	58627
	DIN-rail adapter	27905
	Label plate for use with MVP 17X9mm, white, 2 sets=12 pieces.	996050
	Coding element PU 6 for use with MVP12 / MVP8 - plug. clamps	996054
	adaptor M12 male/ M8 female 3p., seizure 1,3,4	7000-42201-0000000
Comments		
Further cable lengths on request.		
Plastic housings with good resistance against chemicals and oils.		
The resistance to aggressive media should be individually tested for your application. Further details on request.		

Contact layout

M12 Females

4-pole

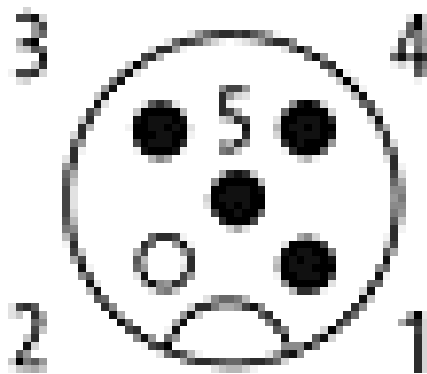

Circuit diagram

