

M12-Steel male straight / M12-Steel female straight PVC-OB 4x0,34 grey 1,5m

Male straight to female straight
M12 - M12, 4-pole

Image



Approvals



Form

40021

Technical Data

Operating voltage	32 V AC/DC
Operating current per contact (40 °C)	max. 4 A
Locking of ports	screw thread M12 x 1 mm (recommended torque = 0.6 Nm) self-securing
Protection	IP68/69K
Temperature range	-40...+85 °C

All data on this data sheet was compiled carefully.


Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 04/11

Cable	
No./diameter of wires	4 × 0.34 mm ²
Wire isolation	PVC (br, wh, bl, bk)
Suitable for C-tracks	no
Jacket	PVC
Outer diameter	approx. 5.0 mm
Bend radius (mobile)	10 x outer diameter
Temperature range (fixed)	-30...+70 °C
Temperature range (mobile)	-5...+70 °C

Commercial data	
Gross weight	81
Net weight	81
Weight unit	gram
Basic unit	pc.
Customs tariff number	85444290
Unit (piece)	1
Limited value	1

Comments	
	Further cable lengths on request.

Contact layout

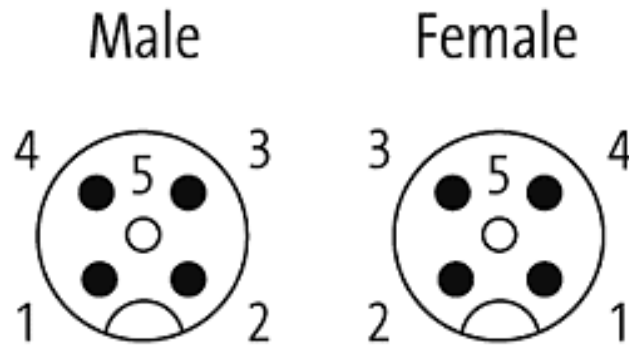

Circuit diagram

