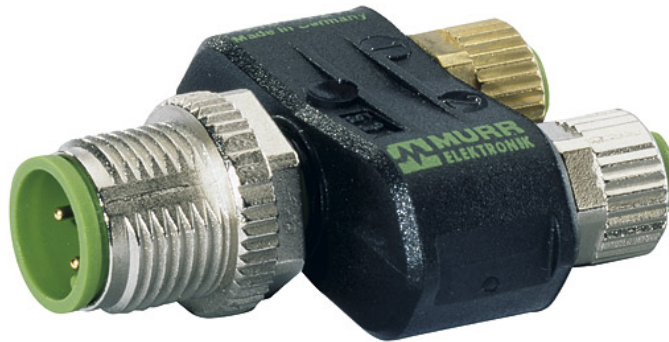


**T-coupler SlimLine M12-male 4p./ 2x M8-female 3p.**

T-coupler (Slimline) M12 - M8  
4-pole  
Distribution function (N/O)

**Image****Form**

41211

**Technical Data**


Operating voltage	30 V AC/DC
Supply current per contact (40 °C)	max. 4 A
Contact resistance	<= 5 MOhm
Test voltage	0.8 kV eff
Protection	IP67 when plugged and screwed down (EN 60529)
Temperature range	-25...+85 °C
Dimensions H x W x D	45 x 32.3 x 15 mm

**Commercial data**

Gross weight	18
Net weight	18
Weight unit	gram
Basic unit	pc.
Customs tariff number	85369010
Unit (piece)	1
Limited value	1

**Comments**

Plastic housings with good resistance against chemicals and oils.  
The resistance to aggressive media should be individually tested for your application. Further details on request.

**Circuit diagram****Contact layout**