
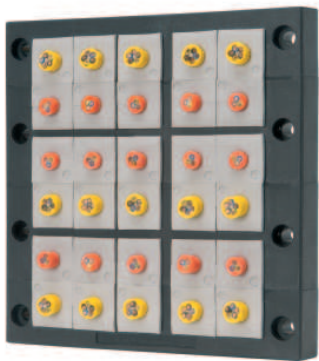


KEL 24 - 2MT

Cable entry frames



| Type | Order No. | Inserts KT small large | PU | Description |
|------|-----------|-----------------------------|----|-------------|
|------|-----------|-----------------------------|----|-------------|

| | | | | |
|---------------------|-------|--------|---|--|
| KEL 24 30-2 MT | 42234 | 30 - | 1 | |
| KEL 24 27-2 MT | 42233 | 26 1 | 1 | |
| KEL 24 24-2 MT | 42227 | 22 2 | 1 | |
| KEL 24 21-2 MT | 42226 | 18 3 | 1 | |
| KEL 24 12-2 MT | 42223 | 6 6 | 1 | |

Product description

The KEL24-2MT is our largest frame offering with the ability to route up to 120 cables.

The cable entry frames KEL24-2MT series are KEL frames extended with two additional middle frames for routing additional cables. Thus allowing the quick, easy and cost effective routing solution for up to 120 cables.

Advantages

- Warranty of pre-terminated cables remains
- Retrofitting and maintenance can be carried out easily and quickly
- High packing density
- Strain relief according DIN EN 50262

Specification

| | |
|--------------------|---|
| Material | Polyamide |
| Flame class | UL-94 Vo, self-extinguishing |
| Protection class | IP 54, with gasket and correct selection of the cable inserts |
| Temperature | -40°C to + 140°C (static) |
| Properties | halogen-free, silicone-free |
| Cut-out dimensions | 126 x 112 mm / page 94 |

Accessories

| | |
|-------------------------|--------------|
| KT Cable inserts | Page 22 26 |
| KEL-EMC Cable collector | Page 74 75 |