

M8 male straight field-wireable screw term. 3-pol. 0,14?0,5mm²

Male straight

3-pole

Screw terminals

Connection cross section: 0.14...0.5 mm²**Image**

Vicarious picture

Form

08601

Technical Data


Operating voltage	max. 60 V AC/DC
Operating current per contact	max. 4 A
Connection cross section	0.14... 0.5 mm ²
Sealing range (cable diameter)	2.5...5.0 mm
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Temperature range	-25...+85 °C

Commercial data


Net weight	50
Weight unit	Gram
Basic unit	pc.
Customs tariff number	85369010
Unit (piece)	1
Minimum order quantity (piece)	1

Contact layout

Male

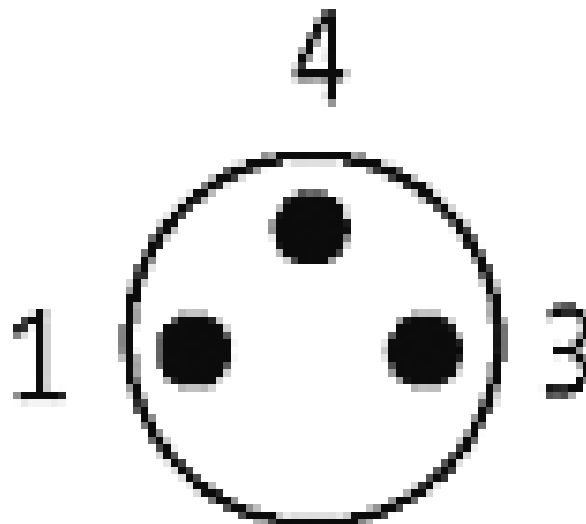

Circuit diagram

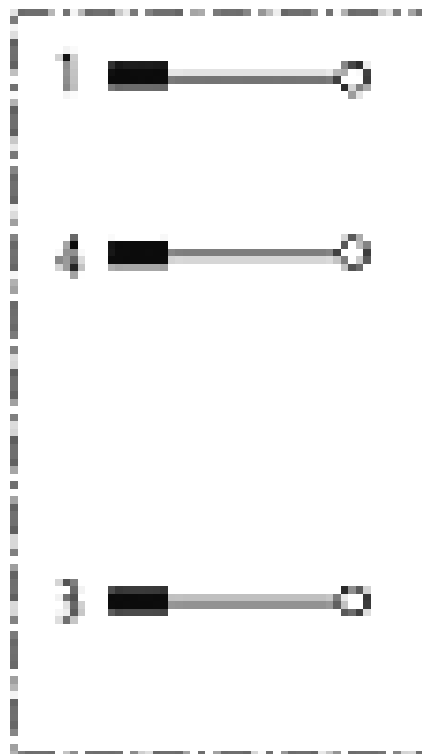

Dimension drawing

