

SAFETY WIRING SYSTEM



Distributor Box




8-way distribution box
without electrical feedback
Replaces identical product (Art.No. 27057)

Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)

Illustration

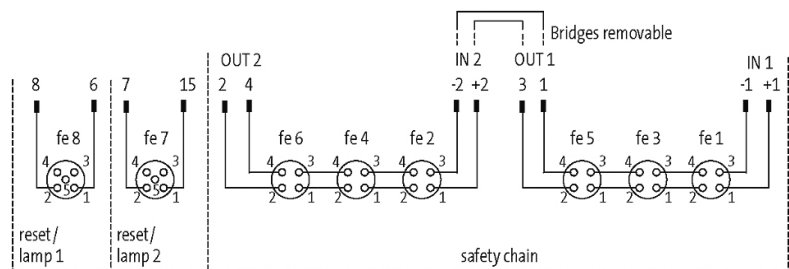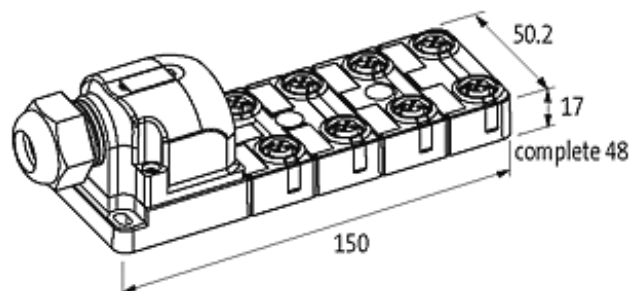

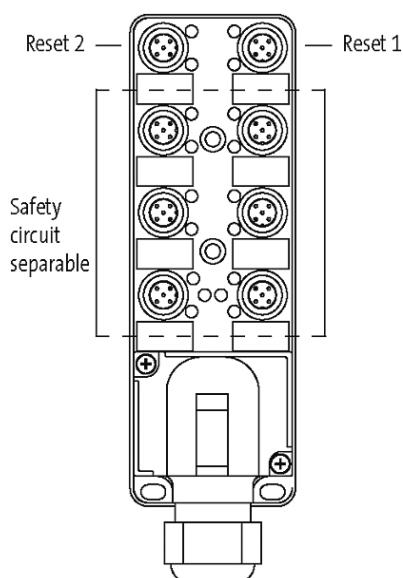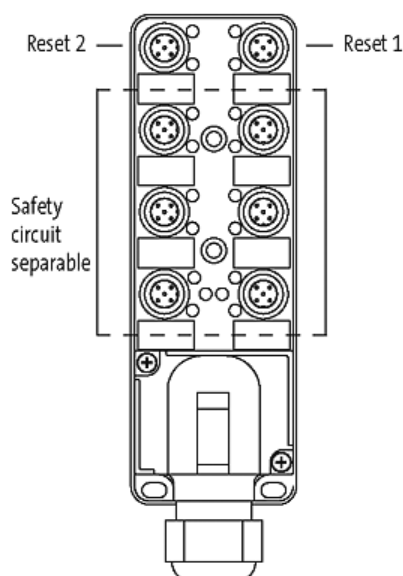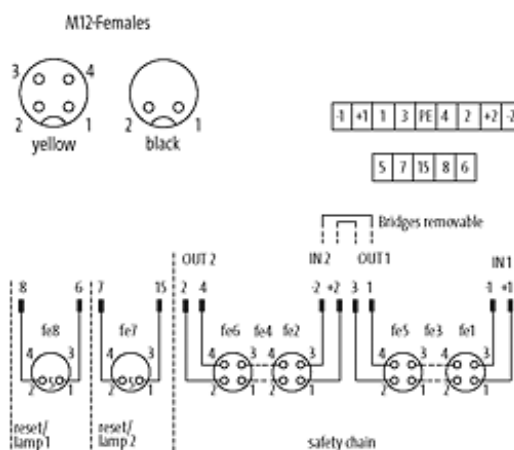

Product may differ from Image

Contact layout

PIN 1

MSDS: 11 (yellow), 13 (black); EMERGENCY-STOP: 11 (black)

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 07/17

Murrelektronik GmbH | Falkenstraße 3 | 71570 Oppenweiler | Fon +49 (71 91) 47-0 | Fax +49 (71 91) 47-491000 | shop@murrelektronik.com | shop.murrelektronik.com

PIN 2	MSDS: 12 (yellow), 14 (black); EMERGENCY-STOP: 12 (black)
PIN 3	MSDS: 21 (yellow); EMERGENCY-STOP: 21 (black)
PIN 4	MSDS: 22 (yellow); EMERGENCY-STOP: 22 (black)

Technical Data

Operating voltage	24 V DC (EN 61131-2)
Operating current (chain)	max. per 1 A
Operating current (black females)	max. per 1 A
Material group	EN 60664-1 over voltage, category III
Isolation resistance	min. 1000 MOhm
Locking of ports	Screw thread M12 × 1 mm

General data

Protection	IP67 inserted and tightened (EN 60529)
Temperature range	-20...+80 °C

Commercial data

country of origin	DE
customs tariff number	85369010
EAN	4048879353380
eClass	27049002
minimum order quantity	1