

Exact8, 10xM8, 3 pole Conn.M12 12 pole

10-way, 3-pole

Inline face or side mounting

Image



Approvals



Contact layout

Contact 1	(+)
Contact 2	(N/C)/(S2)
Contact 3	(-)
Contact 4	(N/O)/(S1)
LED display	LED (green): Power LED (yellow): signal (1) LED (white): Signal (2)

Technical Data

Operating voltage	24 V DC
Supply voltage indicator	LED (green)
Signal per port	1
Status display per port	LED (yellow): contact 4
Supply current per contact (40 °C)	max. 1.5 A
Total current	max. 1.5 A
Comments	The applicable current loads and overload limits of the cables, as defined by the specific standard, must be taken into consideration

General data

Housing	Plastic, flame retardant
Protection	IP67
Temperature range	-20...+70 °C, depending on cable quality


Commercial data

Gross weight	148
Net weight	148
Weight unit	gram
Basic unit	pc.
Customs tariff number	85369010
Unit (piece)	1
Limited value	1


Comments

Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.

Circuit diagram

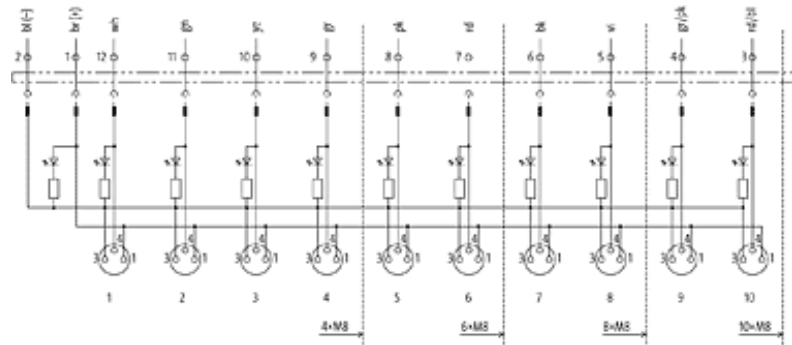

Dimension drawing

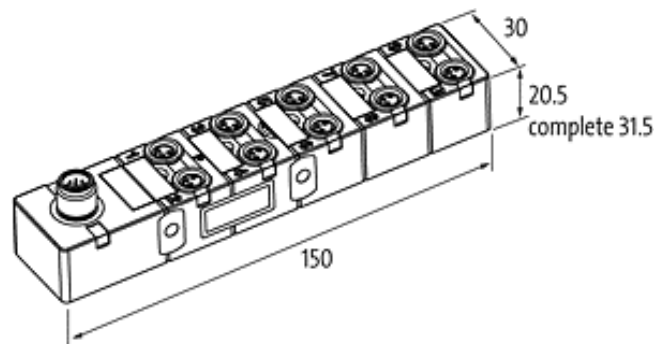

Contact layout

