

Exact8, 4xM8, 3 pole Conn.M128 pole

4-way, 3-pole

M12, 8-pole

inline face or side mounting

Image



Approvals



Contact layout

Contact 1	(+)
Contact 3	(-)
Contact 4	(N/O)/(S1)
LED display	LED (green): Power LED (yellow): signal (S1)

Technical Data

Operating voltage	24 V DC
Signal per port	1
Supply current per contact (40 °C)	max. 2 A
Total current	max. 1.5 A

General data

Housing	Plastic, flame retardant
Protection	IP65, IP67
Temperature range	-20...+70 °C, depending on cable quality

All data on this data sheet was compiled carefully.

Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 02/11


Commercial data

Gross weight	102
Net weight	102
Weight unit	gram
Basic unit	pc.
Customs tariff number	85369010
Unit (piece)	1
Limited value	1


Comments

Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.

Contact layout

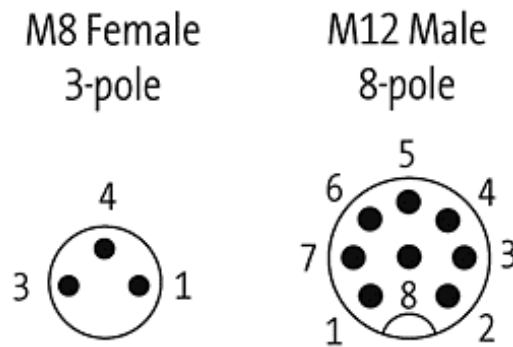

Circuit diagram

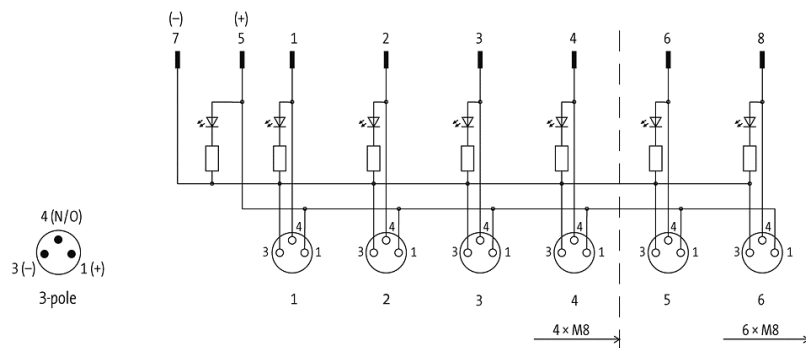

Dimension drawing

