

Exact8, 4xM8, 4-pole, plug. cap, spring-term. 3.0m PUR 8x0,34+2x0,75, UL/CSA

4-way, 4-pole
PUR (UL/CSA), halogen free
10.0 m

Image



Approvals



Contact layout

Contact 1	(+)
Contact 2	(N/C)/(S2)
Contact 3	(-)
Contact 4	(N/O)/(S1)
LED display	LED (green): Power LED (yellow): signal (S1) LED (white): Signal (S2)

Technical Data

Operating voltage	24 V DC
Signal per port	2
Operating current per contact (40 °C)	max. 2 A
Total current	max. 8 A
Housing	Plastic, flame retardant
Protection	IP65, IP67
Temperature range	-20...+80 °C, depending on cable quality

All data on this data sheet was compiled carefully.

Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 04/11

Technical data M8 port

Locking of ports Screw thread M8 x 1 mm

CableNo./diameter of wires 8 x 0.34 + 2 x 0.75 mm²

Jacket PUR (UL/CSA), halogen free

Outer diameter approx. 9.2 mm

Bend radius (mobile) 10 x outer diameter

Temperature range (fixed) -40...+80 °C

Temperature range (mobile) -5...+80 °C

Bend cycles 5 Mio.

Commercial data

Gross weight 1221

Net weight 1221

Weight unit gram

Basic unit pc.

Customs tariff number 85444290

Unit (piece) 1

Limited value 1

Comments


Further cable lengths on request.

Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.

Contact layout

M8 Females 4-pole

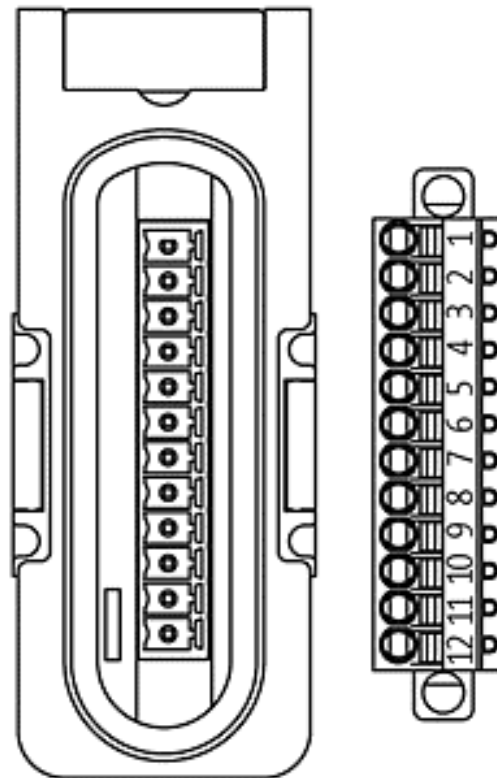

Circuit diagram

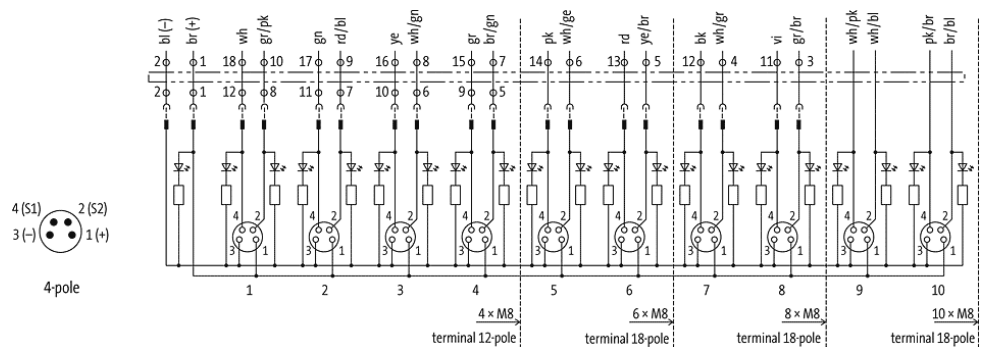

Dimension drawing

