

**M8 male straight / M8 female straight PUR-OB 3x0,25 grey drag chain 2m**

Male straight, 3-pole, to female straight  
M8 - M8

**Image****Approvals****Form**

88001

**Technical Data**

Operating voltage	30 V AC/DC
Supply current per contact (40 °C)	max. 4 A
Fixing	Screw thread M8 x 1 mm <sup>2</sup> (recommended torque = 0.6 Nm) self-securing
Protection	IP67
Temperature range	-25...+85 °C, depending on cable quality

**Cable**

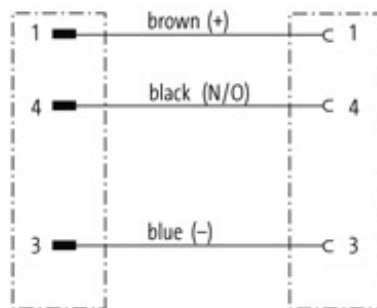
No. and diameter of wires	3 x 0.25 mm <sup>2</sup>
Wire isolation	PP (br, bl, bk)
Suitable for C-tracks	yes
Jacket	PUR (UL/CSA)
Outer diameter	approx. 4.1 mm
Bend radius (mobile)	10 x outer diameter
Temperature range (fixed)	-50...+80 °C
Temperature range (mobile)	-25...+80 °C

**Commercial data**

Gross weight	57
Net weight	57
Weight unit	gram
Basic unit	pc.
Customs tariff number	85444290
Unit (piece)	1
Limited value	1

**Comments**

Further cable lengths on request.  
Plastic housings with good resistance against chemicals and oils.  
The resistance to aggressive media should be individually tested for your application. Further details on request.

**Circuit diagram****Contact layout**