

**M8 male straight / M8 female 90° PVC-OB 4x0,25 yellow 2m**

Male straight, 4-pole, to female 90°C  
M8 - M8

#### Image



#### Approvals



#### Form

88031

#### Technical Data

Operating voltage	30 V AC/DC
Supply current per contact (40 °C)	max. 4 A
Fixing	Screw thread M8 x 1 mm <sup>2</sup> (recommended torque = 0.6 Nm) self-securing
Protection	IP67
Temperature range	-25...+85 °C, depending on cable quality

#### Cable

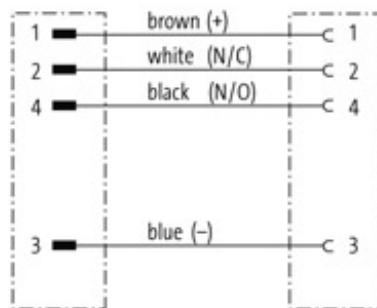
No. and diameter of wires	4 x 0.25 mm <sup>2</sup>
Wire isolation	PVC (br, wh, bl, bk)
Suitable for C-tracks	no
Jacket	PVC
Outer diameter	approx. 4.7 mm
Bend radius (mobile)	10 x outer diameter
Temperature range (fixed)	-30...+70 °C
Temperature range (mobile)	-5...+70 °C

#### Commercial data

Gross weight	75,000
Net weight	75,000
Weight unit	Gramm
Basic unit	ST
Customs tariff number	85444290
Unit (piece)	1,000
Limited value	1,000

#### Comments

Further cable lengths on request.  
Plastic housings with good resistance against chemicals and oils.  
The resistance to aggressive media should be individually tested for your application. Further details on request.

**Circuit diagram****Contact layout****Male****Female**