

Exact8, 8xM8, 3-pole, plug. cap, spring-term. 10.0m PUR 8x0,34+2x0,75, UL/CSA

8-way, 3-pole

PUR (UL/CSA), halogen free

10.0 m

## Image



## Approvals



## Contact layout

Contact 1	(+)
Contact 3	(-)
Contact 4	(N/O)/(S1)
LED display	LED (green): Power    LED (yellow): signal (S1)

## Technical Data

Operating voltage	24 V DC
Signal per port	1
Operating current per contact (40 °C)	max. 2 A
Protection	IP67
Housing	Plastic, flame retardant
Temperature range	-20...+80 °C, depending on cable quality
Total current	max. 8 A

All data on this data sheet was compiled carefully.

Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 04/11



**Technical data M8 port**

Locking of ports Screw thread M8 x 1 mm

**Cable**No./diameter of wires 8 x 0.34 + 2 x 0.75 mm<sup>2</sup>

Jacket PUR (UL/CSA), halogen free

Outer diameter approx. 9.2 mm

Bend radius (mobile) 10 x outer diameter

Temperature range (fixed) -40...+80 °C

Temperature range (mobile) -5...+80 °C

Bend cycles 5 Mio.

**General data**

Protection IP65, IP67

**Commercial data**

Gross weight 1206

Net weight 1206

Weight unit gram

Basic unit pc.

Customs tariff number 85444290

Unit (piece) 1

Limited value 1

**Comments**


Further cable lengths on request.

Plastic housings with good resistance against chemicals and oils.


The resistance to aggressive media should be individually tested for your application. Further details on request.



## Contact layout

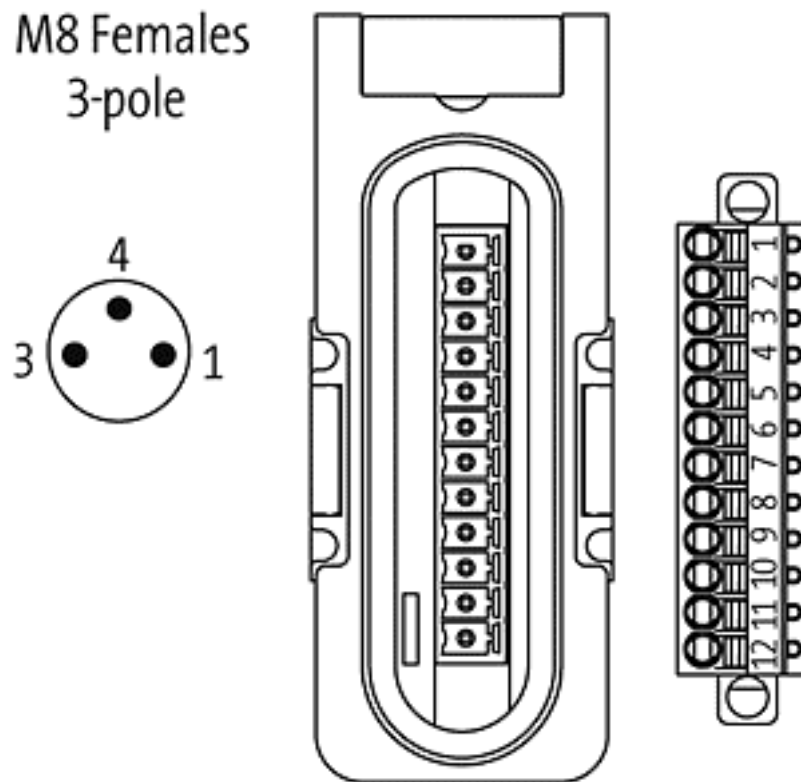

## Circuit diagram

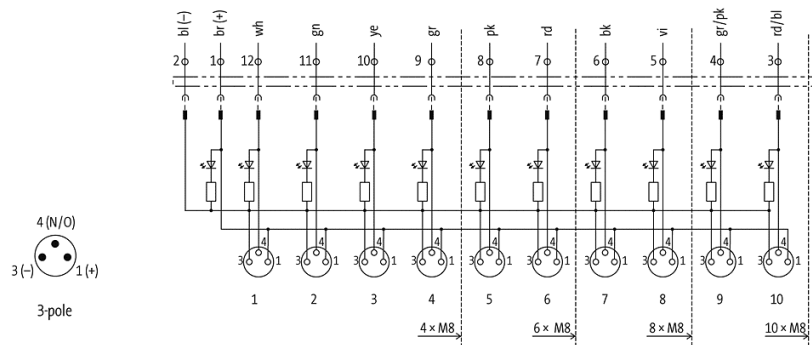

## Dimension drawing

