

**Exact12, 8xM12, 4-pole, moulded cable 5.0m PUR/PVC 8x0,34+3x0,75, UL/CSA**

4-pole  
8-way, 4-pole  
PUR/PVC  
5.0 m

**Image****Approvals****Contact layout**

Contact 1	(+)
Contact 3	(-)
Contact 4	(N/O)/(S1)
Contact 5	(Earth)
LED display	LED (green): Power    LED (yellow): signal (S1)


Technical Data	
Operating voltage	24 V DC
Operating voltage indicator	LED (green) per potential
Operating current per contact (40 °C)	max. 4 A
Housing	Plastic, flame retardant
Protection	IP65, IP67
Temperature range	-20...+60 °C
Total current	max. 8 A
Technical data M12 port	
Locking of ports	Screw thread M12 × 1 mm
Cable	
No./diameter of wires	8 × 0.34 + 3 × 0.75 mm <sup>2</sup>
Jacket	PUR/PVC
Outer diameter	approx. 8.1 mm
Bend radius (mobile)	12 × outer diameter
Temperature range (fixed)	-30...+80 °C
Temperature range (mobile)	-5...+70 °C
Bend cycles	2 Mio.
General data	
Protection	IP65, IP67
Commercial data	
Gross weight	830
Net weight	830
Weight unit	gram
Basic unit	pc.
Customs tariff number	85444290
Unit (piece)	1
Limited value	1
Comments	

Further cable lengths on request.


Plastic housings with good resistance against chemicals and oils.

The resistance to aggressive media should be individually tested for your application. Further details on request.


## Contact layout

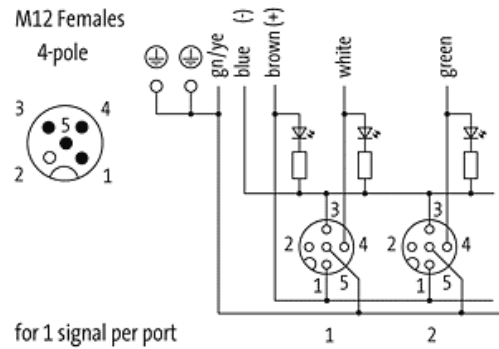

## Circuit diagram

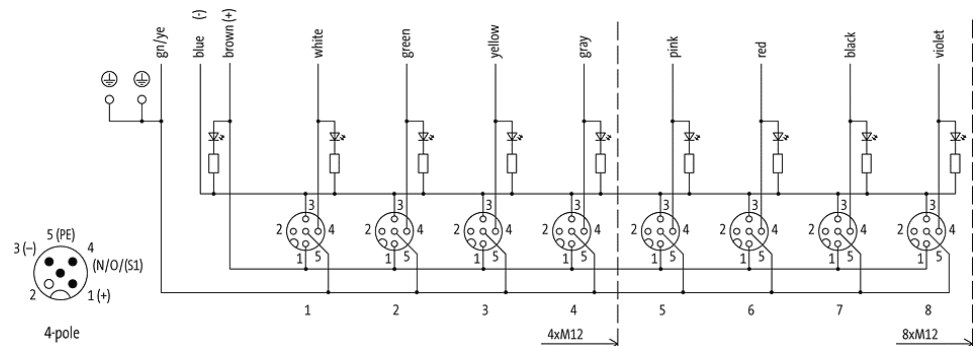

## Dimension drawing

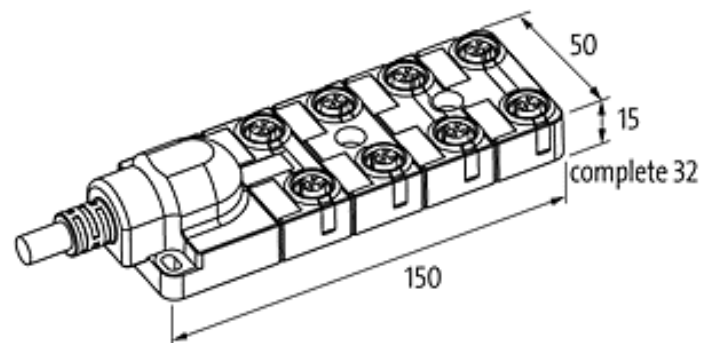

## De-rating curve

