

**MSUD valve form CI 9,4mm with cable PVC-JZ 3x0,75 grey 3m**

Form CI (9.4 mm) industrial standard  
24 V AC/DC with LED and suppression

**Image****Approvals****Form**

94021

**Technical Data**

Operating voltage	24 V AC/DC
Switch off spike	$\leq 55$ V
Switch off delay time	$\leq 20$ ms
Hold current (40 °C)	max. 4 A
LED display	(yellow)
Current consumption	approx. 12 mA
Housing	Plastic, black (gray on request)
Temperature range	-25...+85 °C, depending on cable quality

**Cable**

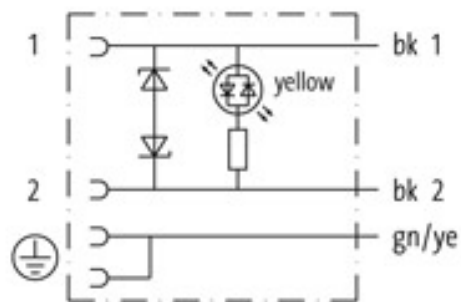
No. and diameter of wires	3 x 0.75 mm <sup>2</sup>
Wire isolation	PVC (bk, num, gnye)
Suitable for use in C-tracks	no
Jacket	PVC
Outer diameter	approx. 5.9 mm
Bend radius (mobile)	10 x outer diameter
Temperature range (fixed)	-30...+70 °C
Temperature range (mobile)	-5...+70 °C

**Commercial data**

Gross weight	199,000
Net weight	199,000
Weight unit	Gramm
Basic unit	ST
Customs tariff number	85444290
Unit (piece)	1,000
Limited value	1,000

**Comments**

Further cable lengths on request.  
Plastic housings with good resistance against chemicals and oils.  
The resistance to aggressive media should be individually tested for your application. Further details on request.

**Circuit diagram****Contact layout**