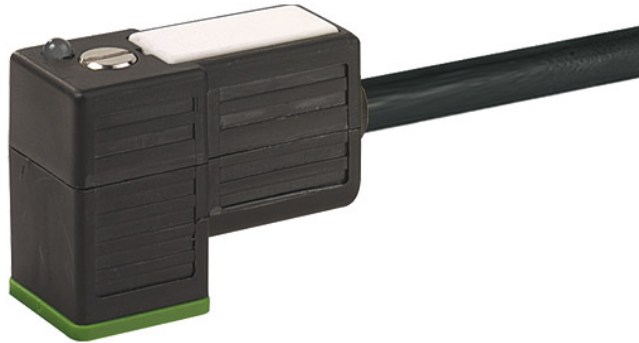


MSUD valve form CI 9,4mm with cable PVC-JZ 3x0,75 black 3m

Form CI (9.4 mm) industrial standard
24 V AC/DC with LED and suppression

Image**Approvals****Form**

94021

Technical Data

Operating voltage	24 V AC/DC
Switch off spike	≤ 55 V
Switch off delay time	≤ 20 ms
Hold current (40 °C)	max. 4 A
LED display	(yellow)
Current consumption	approx. 12 mA
Housing	Plastic, black (gray on request)
Temperature range	-25...+85 °C, depending on cable quality

Cable


No. and diameter of wires	3 x 0.75 mm ²
Wire isolation	PVC (bk, num, gnye)
Suitable for use in C-tracks	no
Jacket	PVC
Outer diameter	approx. 5.9 mm
Bend radius (mobile)	10 x outer diameter
Temperature range (fixed)	-30...+70 °C
Temperature range (mobile)	-5...+70 °C

Commercial data

Gross weight	182,000
Net weight	182,000
Weight unit	Gramm
Basic unit	ST
Customs tariff number	85444290
Unit (piece)	1,000
Limited value	1,000

Comments

Further cable lengths on request.
Plastic housings with good resistance against chemicals and oils.
The resistance to aggressive media should be individually tested for your application. Further details on request.

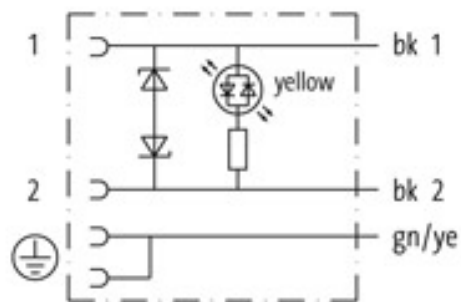Circuit diagram**Contact layout**