



Clamp-style Universal Bracket™ (CUB)

CUB™ Base Mounting Options (Shown with optional brackets):

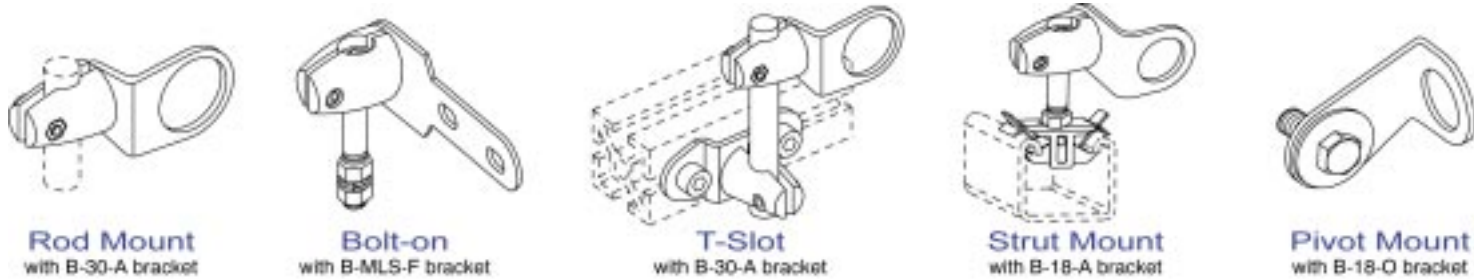


Base Mounting Option specifications- Dimensions are mm(in), select sensor brackets from next page.

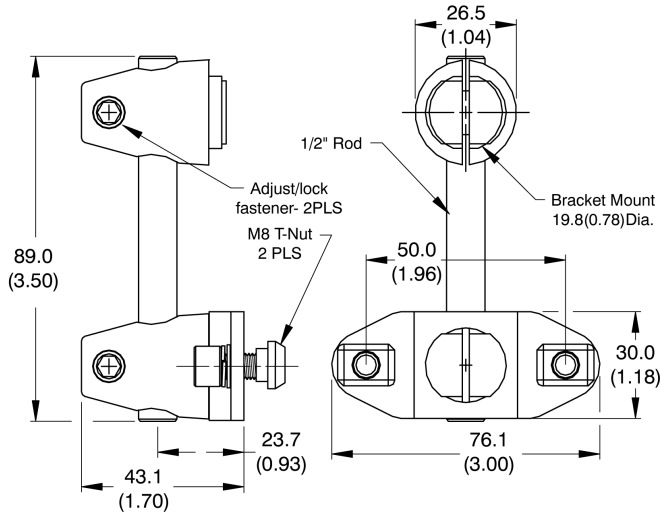

CUB-R...

Rod mount CUB™


Half-klamp set attaches to customer supplied 1/2" diameter rod stock, or see page 33 to purchase rods from SoftNoze. Notes: 1) Materials; HalfKlamp- zinc alloy, nickel-plated, adjust/lock fasteners 303 SS.



CUB-T...

T-slot mount CUB™


T-slot bracket, two HalfKlamp sets and rod assembly attaches to most brands of extruded aluminum (T-slot). Notes: 1) Materials; HalfKlamps- nickel-plated zinc alloy, Adjust/lock fasteners- 303 SS, Bracket and Rod- stainless steel.



CUB-B...

Bolt-on CUB™



Half-klamp set and 3/8" bolt attaches to through hole or a 3/8-16NC tapped hole. Notes: 1) Materials; HalfKlamp- zinc alloy, nickel-plated, fasteners- 303 stainless steel.



CUB-S...

Strut-mount CUB™

Half-klamp set, 3/8" bolt and strut clip attach to customer supplied 1-5/8" wide strut channels. Notes: 1) Materials; HalfKlamps nickel-plate zinc alloy, strut clip- plated CRS other fasteners 303 Stainless steel.

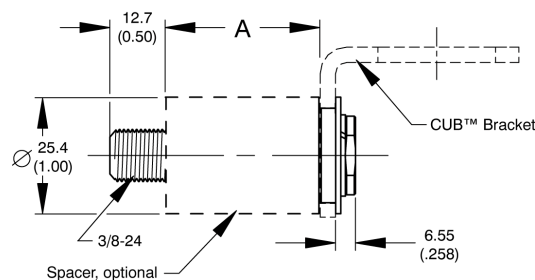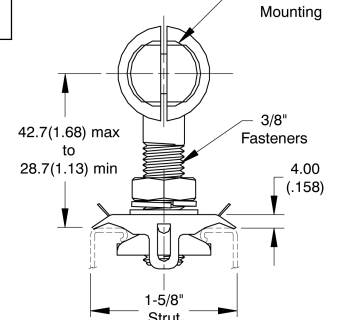

CUB-P

Model	A	Pivot-mount CUB™
CUB-P...	0.00 (0.00)	Uses no HalfKlamp set, thus provides only a single pivoting axis. CUB brackets mount with a 3/8" low-head bolt and bushing. Optional spacers, see pg. 33. Notes: 1) Materials: Bushing, zinc-plated CRS, bolt and fasteners; all stainless steel.
CUB-P38...	38.1 (1.50)	
CUB-P76...	76.2 (3.00)	