


DC SHORT BODY WITH EXTENDED SENSING DISTANCE PROXIMITY SWITCH


Q8
●
2 mm
die-cast
●

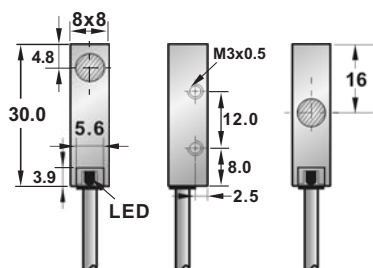

10-30VDC
<10%
<10mA
200mA
<0.01mA
-
-
<1.5V
2KHZ
0.1ms/0.1ms
<15%(Sr)
<1.0%(Sr)
IP67
-25 °C - +70 °C
<10%(Sr)
YES
220mA
<10ms

RFI>3V/m / EFT>1KV / ESD>4KV (contact)
IEC 60947-5-2,Part 7.4.1 / IEC 60947-5-2,Part 7.4.2


POM

[illegible]

top sensing style center sensing style

3.0 ϕ 3x0.15
Approx.38 g

ø11	
	
4 mm	8 mm
nickel plated brass	
	



10-30VDC	
<10%	
<10mA	
200mA	
<0.01mA	
-	
-	
<1.5V	
1KHZ	500HZ
0.2ms/0.2ms	0.5ms/0.5ms
<15%	
<1.0%(Sr)	
IP67	
-25 °C - +70 °C	
<10%(Sr)	
YES	
220mA	
<10ms	

RFI>3V/m / EFT>1KV / ESD>4KV (contact)
IEC 60947-5-2.Part 7.4.1 / IEC 60947-5-2.Part 7.4.2


POM

[illegible]

Please see Page 18 for details and specifications of DC 2-Wire models on this page.

4 ϕ 3x0.34
Approx.58 g

M12	
	
4 mm	8 mm
nickel plated brass	
	



10-30VDC	
<10%	
<10mA	
200mA	
<0.01mA	
-	
-	
<1.5V	
1KHZ	500HZ
0.2ms/0.2ms	0.5ms/0.5ms
<15%	
<1.0%(Sr)	
IP67	
-25 °C - +70 °C	
<10%(Sr)	
YES	
220mA	
<10ms	

RFI>3V/m / EFT>1KV / ESD>4KV (contact)
IEC 60947-5-2.Part 7.4.1 / IEC 60947-5-2.Part 7.4.2

POM	PBT
-----	-----

[illegible]

4 ϕ 3x0.34
Approx.62 g