



Xtra BENEFITS

- All standard tapes are 30 feet long (See tape guide on back)
- All standard tapes have split back liner, except 1/6"-4mm
- PX tapes are backwards compatible with older K-Sun® Printers
(Visit www.ksun.com for details)

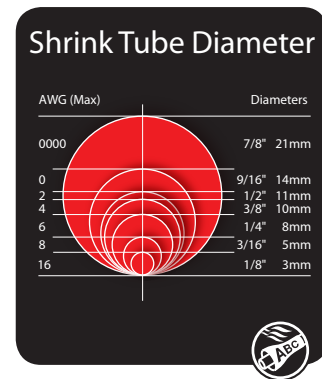

- PX Tapes have a standard rewind feature to reduce tape waste (works with PX rewind printers)
- New tapes including die cut labels and 5 colors of magnetic tapes
- All supplies are RoHs and REACH compliant

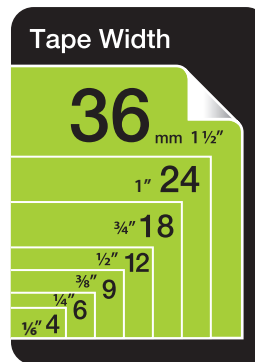

Sold by
K-Sun®
www.ksun.com

K-Sun® 370 SMC Drive, Somerset, WI 54025
www.ksun.com • info@ksun.com • 1-800-622-6312

SL00575-B

Standard Industrial Tapes 30' unless noted

1/6" 4mm	BLACK on clear	BLACK on white	BLACK on yellow	204BWPX	204BYPX
-------------	--------------------------	--------------------------	---------------------------	---------	---------

1/4" 6mm	BLACK on clear	BLACK on white	BLACK on green	BLACK on blue	BLACK on red	206BWPX	206BGPX	206BBPX	206BRPX
-------------	--------------------------	--------------------------	--------------------------	-------------------------	------------------------	---------	---------	---------	---------

3/8" 9mm	BLACK on clear	BLACK on white	BLACK on yellow	WHITE on black	BLACK on blue	BLACK on red	209BWPX	209BGPX	209BBPX	209BRPX
-------------	--------------------------	--------------------------	---------------------------	--------------------------	-------------------------	------------------------	---------	---------	---------	---------

1/2" 12mm	BLACK on clear	BLACK on white	BLACK on yellow	WHITE on black	BLACK on green	BLACK on blue	BLACK on red	212BWPX	212BGPX	212BBPX	212BRPX
--------------	--------------------------	--------------------------	---------------------------	--------------------------	--------------------------	-------------------------	------------------------	---------	---------	---------	---------

3/4" 18mm	BLACK on clear	BLACK on white	BLACK on yellow	WHITE on black	BLACK on green	BLACK on blue	BLACK on red	218BWPX	218BGPX	218BBPX	218BRPX
--------------	--------------------------	--------------------------	---------------------------	--------------------------	--------------------------	-------------------------	------------------------	---------	---------	---------	---------

1" 24mm	BLACK on clear	BLACK on white	BLACK on yellow	WHITE on black	BLACK on green	BLACK on blue	BLACK on red	224BWPX	224BGPX	224BBPX	224BRPX
------------	--------------------------	--------------------------	---------------------------	--------------------------	--------------------------	-------------------------	------------------------	---------	---------	---------	---------

1 1/2" 36mm	BLACK on clear	BLACK on white	BLACK on yellow	WHITE on black	BLACK on green	BLACK on blue	BLACK on red	236BWPX	236BGPX	236BBPX	236BRPX
----------------	--------------------------	--------------------------	---------------------------	--------------------------	--------------------------	-------------------------	------------------------	---------	---------	---------	---------

SPECIALTY TAPES

Glow-in-the-Dark 4.9'



212LMYPX	1/2" Black on glow-in-the-dark
218LMYPX	3/4" Black on glow-in-the-dark
224LMYPX	1" Black on glow-in-the-dark
236LMYPX	1-1/2" Black on glow-in-the-dark

Permanent Aggressive 25'



3/8"	Black on white	Black on yellow	Black on silver matte
1/2"	209PABWPX	209PABYPX	209PASMPX
1/2"	212PABWPX	212PABYPX	212PASMPX
3/4"	218PABWPX	218PABYPX	218PASMPX
1"	224PABWPX	224PABYPX	224PASMPX
1 1/2"	236PABWPX	236PABYPX	236PASMPX

Self-Lamination Overwrap 30'



224SLPX	1/4" Black on white
236SLPX	3/4" Black on white
248SLPX	1" Black on white
258SLPX	1 1/2" Black on white

Wire wrap tape prints on white area and has clear tail to overlap printed material

More Sizes, More Colors For All Your Industrial Labeling Needs



1/2"	WHITE on clear	WHITE on vivid red	WHITE on vivid green	WHITE on vivid blue	GOLD on clear	GOLD on black	BLACK on white removable adhesive	WHITE on brown 24'
------	-----------------------	---------------------------	-----------------------------	----------------------------	----------------------	----------------------	--	---------------------------

3/4"	WHITE on clear	WHITE on vivid red	WHITE on vivid green	WHITE on vivid blue	WHITE on vivid orange	Black on violet	BLUE on white	RED on white	RED on clear	BLACK on translucent matte
------	-----------------------	---------------------------	-----------------------------	----------------------------	------------------------------	------------------------	----------------------	---------------------	---------------------	-----------------------------------

1"	WHITE on clear	WHITE on vivid red	WHITE on vivid green	WHITE on vivid blue	WHITE on vivid orange	BLACK on white super strong adhesive	BLACK on yellow super strong adhesive	WHITE on brown 24'
----	-----------------------	---------------------------	-----------------------------	----------------------------	------------------------------	---	--	---------------------------

1 1/2"	WHITE on clear	WHITE on vivid red	WHITE on vivid green	WHITE on vivid blue	BLACK on violet	BLACK on white super strong adhesive	BLACK on yellow super strong adhesive	RED on white	RED on yellow
--------	-----------------------	---------------------------	-----------------------------	----------------------------	------------------------	---	--	---------------------	----------------------

Fabric Tape Iron On 16'4"



3/8"	Black on blue	Black on pink
1/2"	209FBPX	209FBPX

Reflective Tape 4' 9"



224RFWPX	1" Black on Reflective white
224RFYPX	1" Black on Reflective yellow

Die Cut (For Use With LW-PX900 Only)



Circle	25mm/1"	224CBWPX	224CBWPX
Oval	25mm x 38mm	224OBWPX	224OBWPX
Square	1" x 1.5"	224SBWPX	224SBWPX



3/8"	Black on silver matte
1/2"	209SMXPX
3/4"	212SMXPX
1"	218SMXPX
1 1/2"	224SMXPX

Magnet Tape 11'



1/2"	Black on white	Black on yellow	Black on red	Black on blue	Black on green
3/4"	212MTBWPX	212MTBYPX	212MTBRPX	212MTBGPX	212MTBGPX
1"	218MTBWPX	218MTBYPX	218MTBRPX	218MTBGPX	218MTBGPX
1 1/2"	224MTBWPX	224MTBYPX	224MTBRPX	224MTBGPX	224MTBGPX

Shrink Tube 96" Compliance Standards: UL Standard 224 (Related Temperature: 125°C, Rated Voltage: 300V, Flame Resistance Grade VW-1)



1/8"	Black on red	Black on yellow	Black on white	Black on green	White on black
3/16"	203STBRPX	203STBYPX	203STBWPX	203STBGPX	203STBGPX
1/4"	205STBRPX	205STBYPX	205STBWPX	205STBGPX	205STBGPX
3/8"	208STBRPX	208STBYPX	208STBWPX	208STBGPX	208STBGPX
1/2"	211STBRPX	211STBYPX	211STBWPX	211STBGPX	211STBGPX
5/8"	214STBRPX	214STBYPX	214STBWPX	214STBGPX	214STBGPX
3/4"	217STBRPX	217STBYPX	217STBWPX	217STBGPX	217STBGPX

Fluorescent 30'



218FRPX	Black on fluorescent red
218FPPX	Black on fluorescent pink
218FOPX	Black on fluorescent orange
218FYPX	Black on fluorescent yellow
218FGPX	Black on fluorescent green