


LF | SKL EMC Shield clamps

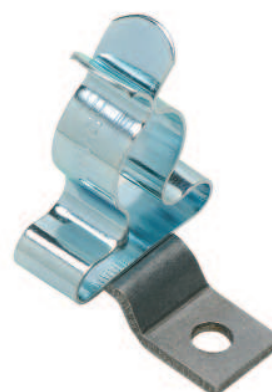

Type	Order No.	Shield diameter	Fixing hole	PU
LF SKL 1.5 - 3	36251	1.5 - 3.0 mm	4.1 mm	10
LF SKL 3 - 6	36253	3.0 - 6.0 mm	4.1 mm	10
LF SKL 6 - 8	36255	6.0 - 8.0 mm	4.1 mm	10
LF SKL 9 - 11	36256	9.0 - 11 mm	4.1 mm	10
LF SKL 12 - 16	36257	12 - 16 mm	4.1 mm	10
LF SKL 17 - 22	36258	17 - 22 mm	4.1 mm	10
LF SKL 23 - 29	36259	23 - 29 mm	4.1 mm	10

Product description

SKL shield clamps can be used for shielding single cables. The shield clamps enable an easy to use and a reliable shielding of cables.

Shield clamps are easily attached to mounting plates via screw.

Advantages

- Optimal contact of the cable shielding
- Simple and tool-free assembly
- Permanent and continuous spring load on the cable shield - no adjustment of the spring load required
- Cost effective solution
- High packing density because of an optimized arrangement

Specification

Material	
SKL-clamp	Stainless steel (SKL 1.5-3 / SKL 3-6) Spring steel (from SKL 6-8)
LF-foot	Steel, galvanically zinc-plated Fixing hole 4.2 mm for screw M4

Accessories

EMC - Servicebox	Page 61
Stripping tool	Page 77