





011 011 10	40	
	Black	_
	on blue	Q.
3/8"	209FBBPX	209
1 /2//	מספספס	, ,







tion	tion Overwrap 30	rap 30'
	224SLPX	1/4" Black on white
\		3/4" Clear Tail (30')
1	236SLPX	1/2" Black on white

_		
3	_	I
٥	1/2"	ŀ
on Overwrap 30'	1/2" 236PABWPX 236PABYPX 236PAS	
30'	236PABYPX	
	236PAS	1

	Black	Black	Black
	on white	on yellow	on silver matte
3/8"	209PABWPX 209PABYPX 209PASMPX	209PABYPX	209PASMPX
1/2"	212PABWPX 212PABYPX 212PASMPX	212PABYPX	212PASMPX
3/4"	218PABWPX 218PABYPX 218PASMPX	218PABYPX	218PASMPX
1"	224PABWPX 224PABYPX 224PASMPX	224PABYPX	224PASMPX
1 1/2"	1 1/2" 236PABWPX 236PABYPX 236PASMPX	236PABYPX	236PASMPX

			6
Slack	Black	Black	
ı white	on yellow	on silver matte	
PABWPX	Pabwpx <mark>209Pabypx 209Pasmp</mark> x	209PASMPX	
PABWPX	PABWPX 212PABYPX 212PASMPX	212PASMPX	M-2250+
PABWPX	PABWPX 218PABYPX 218PASMPX	218PASMPX	Madiler
PABWPX	PABWPX 224PABYPX 224PASMPX	224PASMPX	
PABWPX	PABWPX 236PABYPX 236PASMPX	236PASMPX	
vrap 30'	30 <u>'</u>		
1/4" BI	1/4" Black on white	,	

	as		SMPX	SMPX
REIT CONTROL OF THE PARTY OF TH	Shrink Tube 96'		Comment Limited	Magnet Tape 11
3/1	Con Rate	-	<u>ω</u>	`

1	L'E	AL A	AZ ZE	14				Shrink Tube 96'		
7/8"	9/16"	1/2"	3/8"	1/4"	3/16"	1/8″		Compli Rated V	1 1/2"	-
0000-1	0-5	2-8	6-18	10-20	8-12	16-22	AWG	ance S oltage:		7241
		211STBRPX			205STBRPX		Black on red	Compliance Standards: Rated Voltage: 300V, Flam	236MTBWPX	224IVI I DVVPA
								. ⊣	10	I٨

SPECIALTY TAPES

212LMYPX	212LMYPX 1/2" Black on glow-in-the-dark
224I MYPX	224LMYPX 1"Black on alow-in-the-dark
236LMYPX	236LMYPX 1-1/2" Black on glow-in-the-dark
ž	
Q	

	236LMYPX	224LMYPX	218LMYPX	212LMYPX	
•	236LMYPX 1-1/2" Black on glow-in-the-dark	224LMYPX 1"Black on glow-in-the-dark	218LMYPX 3/4" Black on glow-in-the-dark	212LMYPX 1/2" Black on glow-in-the-dark	



Towns of the last	1	Reflective Tape 4' 9"	
224RFYPX 1"Blac	224RFWPX 1"Blac	4' 9"	
< 1″Blad	X 1″Blad		

Desktop
360 dpi
27.1 mm
4-36mm, 1/6"No
Auto/Half/Trimm
Max 35mm/sec
PX only
No
Yes
Yes
USB 2.0 Full-speed, v
(10/100BASE-TX), wi
LAN (IEEE 802.1 1b/g)

			n glow-in-the-dark
		S. Carlotte	ow-in-the-dark
1"Blac	224RFYPX 1"Blac	No.	glow-in-the-dark
1"Blac	224RFWPX 1"Blac		glow-in-the-dark

	- 107	
P		
9	14	
	3	
		•

- Sold	١	ruse indee
224RFYPX	224RFWPX	
224RFYPX 1"Black on Reflective	224RFWPX 1"Black on Reflective	

V 11V	V140	774W DDF 7	224W DIF 2	V 7 V V V V V	_
22/1/	DOMNTBERN DOMN	CONTRACT	VARATIMATE VAVATIMATE VALUE VA	22/MTBMBV	111
7 10141	VIONIDUTY	V LOIVI DITT	Z I OIVI D I F A	ZIGIVII DVYFA ZIGIVII DIFA	1/4
2		7,000	7797	2700	2//2
141717	V 1001 V	V 1010111	11011111	7 1 2 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	1/1
717	212M RRPX	212M BREX	212M RYPX	212M RWCX	7/7"
2110	OH OHE	Offica	On yenow	OHVINE	
2	on blue	On red	on vellow	on white	
2	DIGCN	DIGCN	סומכא	DIGCN	
•	DI SAL	DI.	Plack	Black	

USTRIAL LABELING SUPPLIES dard 7 sizes,

	8
	Compli Rated V
AWG	ance Stollage:
Black	t andards:
on red	300V, Flam
Black	UL Standa
on yellow	ne Resistan
Black	Compliance Standards: UL Standard 224 (Related Ten
on white	Rated Voltage: 300V, Flame Resistance Grade VW-1)
Black	lated Tei
on gree	W-1)



Standard Industrial Tapes 30' unless noted

More Sizes, More Colors

BRAND

EPSON

SPECIFICATIONS

LABELWORKS PX **LW-PX800**

SIMPLE / FLEXIBLE / VERSATILE / POWERFUL





LIFETIME WARRANTY



LW-PX800 PRINTER FEATURES

A compact design and useful features make this printer the perfect solution for industrial label printing.

SIMPLE

Cartridges load from the top for a more compact design and quick-change supplies

PEELGuard® corner trimmer extends label life.





FLEXIBLE



Connect multiple users wirelessly with iOS or Android or through a LAN.



iLabel



For iOS and Android

POWERFUL



Quietly prints up to 35mm/sec and can reduce tape waste to 1mm*.



Create continuous series of half-cut labels for large print jobs


*A 10mm lead is standard on a single label, or the first label in a batch

Software Features

The LW-PX800 includes Label Editor Professional, the most powerful label-creating software built for performance and designed for simplicity.

Easy-to-use icons and clean layout streamline in-house labeling.

Import from Excel, Word, or create your own data table.

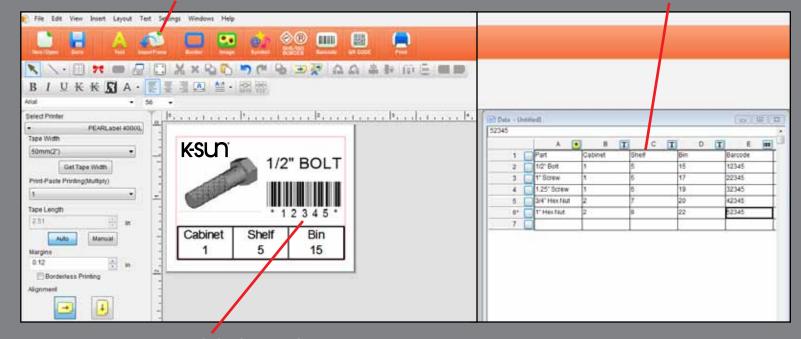

Customize label templates with logos, images, and barcodes. Files are easily saved, recalled, and shared.







Communicate clearly with over 1,000 symbols, pre-formatted signal words in 23 languages, and GHS/ISO images.

100s of pre-formatted templates for facility, safety, or general labeling.

