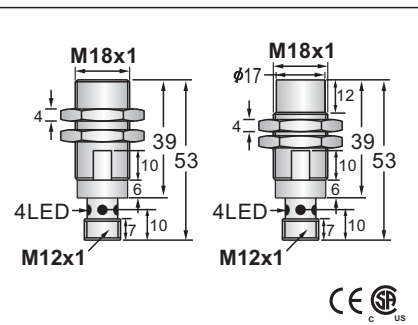


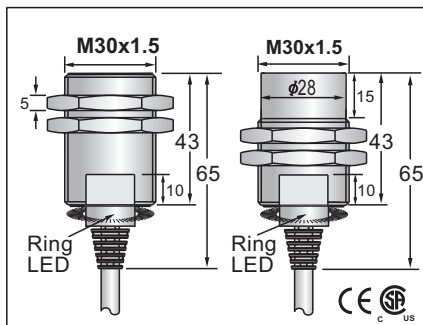
DC HIGH TORQUE, EXTENDED SENSING RANGE (SHORT BODY)

M18	
●	○
8.0	16.0
Nickel plated brass	

[illegible]

Approx.70 g

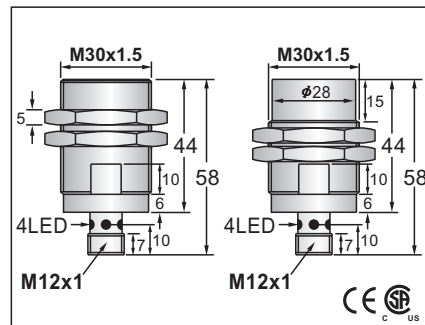
M30	
	
16.0	25.0
Nickel plated brass	
	

[illegible]

A vertical diagram of a probe. The top part has a hexagonal base with two hexagonal nuts. Below this is a long, thin shaft. In the middle of the shaft, there is a break symbol consisting of two wavy lines. Below the break, the shaft continues down to a wider, textured base.

5.8 ϕ 3x0.5
Approx.280 g

M30	
●	○
16.0	25.0
Nickel plated brass	
●	

[illegible]

Approx. 200 g