
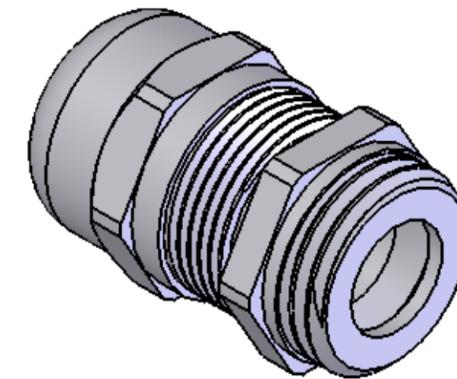
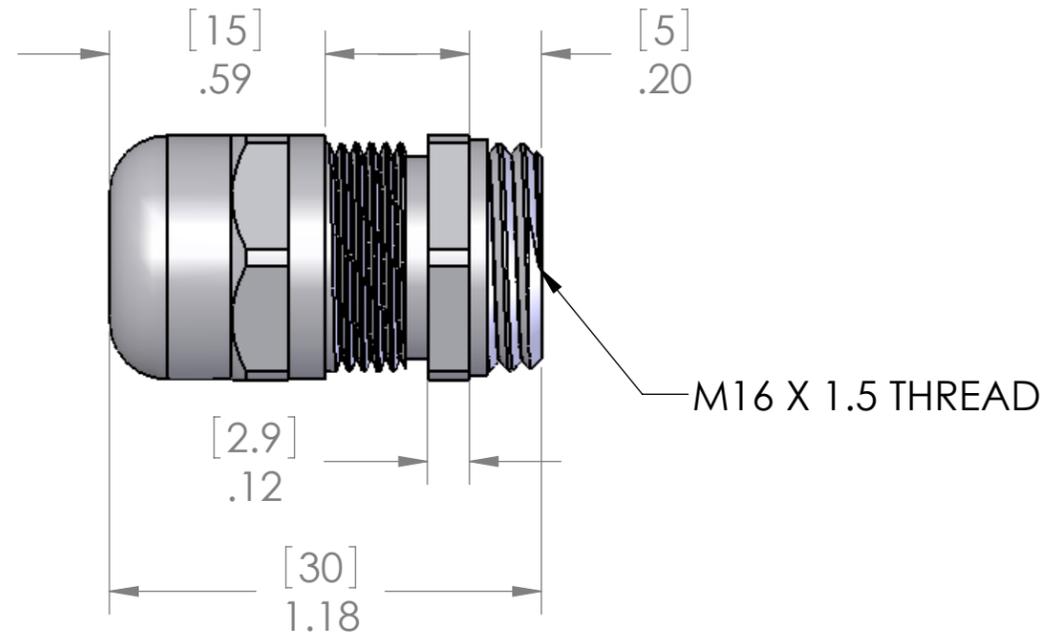


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	12/15/2008	

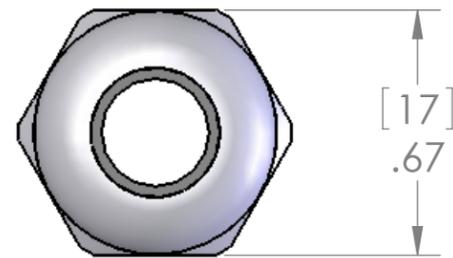

LOCK NUT INCLUDED
BUT NOT SHOWN FOR CLARITY

SEALING RANGE: 3-9MM
SEAL RATED TO: IP 68

MATERIALS:	
BODY:	NICKEL PLATED BRASS
INSERT:	POLYAMIDE
GROMMET:	NBR & TPE
LOCK NUT:	NICKEL PLATED BRASS
O-RING:	NBR

SPECIFICATIONS:	
TEMPERATURE:	-20°C - +100°C

APPROVALS:	
U.S.	UL RECOGNIZED
CANADA	C-UL RECOGNIZED

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
TOLERANCES:
FRACTIONAL ±1/64
ANGULAR: MACH ±5° BEND ±5°
TWO PLACE DECIMAL ±.01
THREE PLACE DECIMAL ±.004

MATERIAL

FINISH

DO NOT SCALE DRAWING

NAME	CAM
DRAWN	
CHECKED	
ENG APPR.	
MFG APPR.	
Q.A.	
COMMENTS:	

MENCOM CORPORATION

TITLE:

SIZE DWG. NO. REV

B MCG-M16 **A**

SCALE: 2:1 WEIGHT: SHEET 1 OF 1