
		8	7	6		5	÷.	4			3
	PIN #	COLOR									
-			-						_	REV.	DESC
-	1	BROWN	-							A	REDRA
D	2	WHITE	-								
	3	BLUE	-								
-	4	BLACK	-								
	5	GRAY	-		l		1				
C B	MATERIA				[15.6]			OCKNUT AR 9" AND LON			ED

	BODY:	CLEAR AN	LEAR ANODIZED ALUMINUM			
	INSERT:	POLYAMI	OLYAMIDE			
	CONTACTS:	GOLD PLA	OLD PLATED COPPER ALLOY			
	WIRE:	UL1007 22	.1007 22AWG			
А	O-RING:	NBR				
	LOCKNUT:	ZINC PLA	INC PLATED STEEL			
	APPROVALS:					
	US	UL REC	UL RECOGNIZED			
	CANADA	C-UL R	C-UL RECOGNIZED			
	8		7			

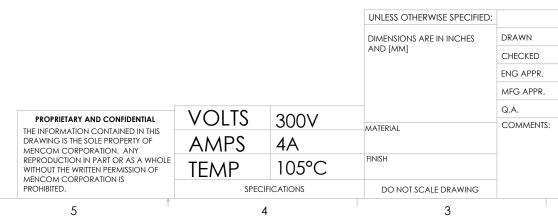

	2		1		_
F	REVISIONS				
escription		DATE	AP	PROVED	
RAWN IN S	W	11/16/2004	4		
					D
					С
T.	ABLE A				-
P	/N			L	
М	DC-5MR-2	2	12"	[0.3M]	В
М	DC-5MR-2	2-0.5M	19"	[0.5M]	
М	DC-5MR-	2-1M	40''	[1M]	
М	DC-5MR-2	2-2M		[2M]	
M	DC-5MR-2	2-5M	197"		
	DC-5MR-2			[10M]	
NAME		M CORF			
BEM T					-
					A
	ze dwg. no ME	DC-5MR-2-	-ZZ	REV	-
S	CALE: 2:1 WEIG	GHT:	SF	ieet 1 of 1	
	2	I	1		