

PIN #	COLOR
1	WHITE
2	RED
3	GREEN / YELLOW
4	ORANGE
5	BLACK

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	7/23/2004	

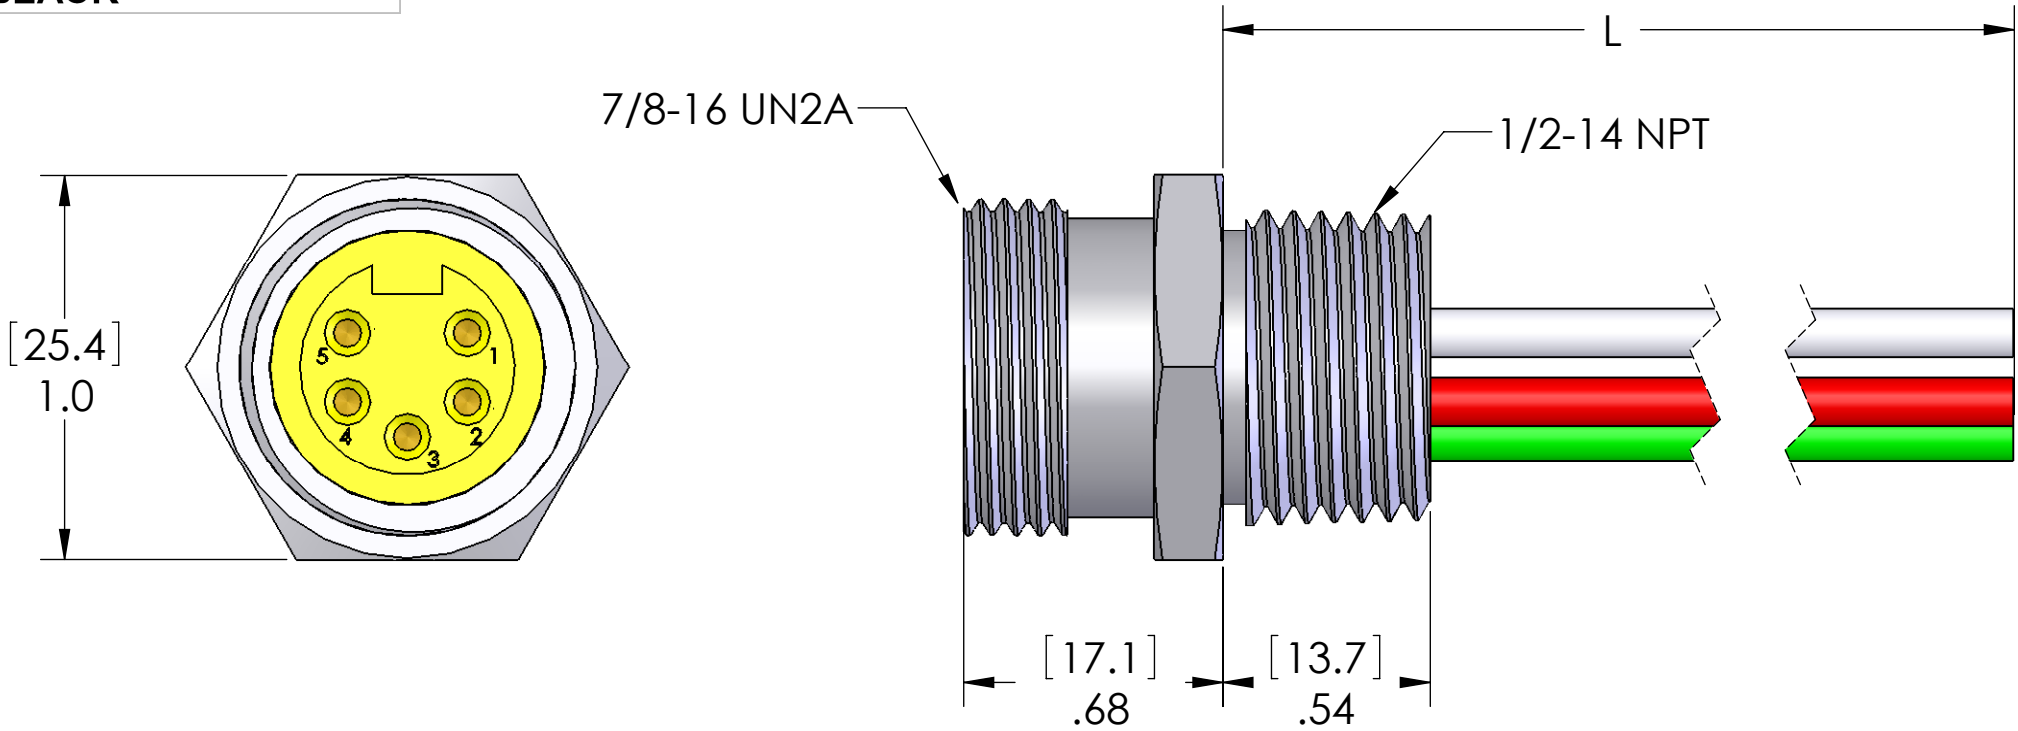


TABLE A	
P/N	L
MIN-5FR-.5	6"
MIN-5FR-1	12"
MIN-5FR-2	24"
MIN-5FR-3	36"
MIN-5FR-4	48"
MIN-5FR-6	72"
MIN-5FR-10	120"
MIN-5FR-15	180"
MIN-5FR-20	240"

MATERIALS	
BODY:	CLEAR ANODIZED ALUMINUM
CONTACTS:	GOLD PLATED COPPER ALLOY
INSERT:	YELLOW PVC
WIRE:	16AWG UL1015
LOCKNUT:	ZINC PLATED STEEL
O-RING:	NBR

APPROVALS	
U.S.	UL RECOGNIZED
CANADA	C-UL RECOGINIZED

LOCKNUT AND O-RING ARE INCLUDE ON LENGTHS OF 24" AND LONGER.

**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

VOLTS	600V
AMPS	8A
TEMP	105°C
SPECIFICATIONS	

UNLESS OTHERWISE SPECIFIED:		NAME
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN	BEM
	CHECKED	
	ENG APPR.	
	MFG APPR.	
	Q.A.	
MATERIAL	COMMENTS:	
FINISH		
DO NOT SCALE DRAWING		

PARTS LISTED AS NOT BEING STANDARD MAY HAVE MINIMUM ORDER QUANTITIES

MENCOM CORPORATION

TITLE:		
SIZE	DWG. NO.	REV
B	MIN-5FR-ZZ	A
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1