
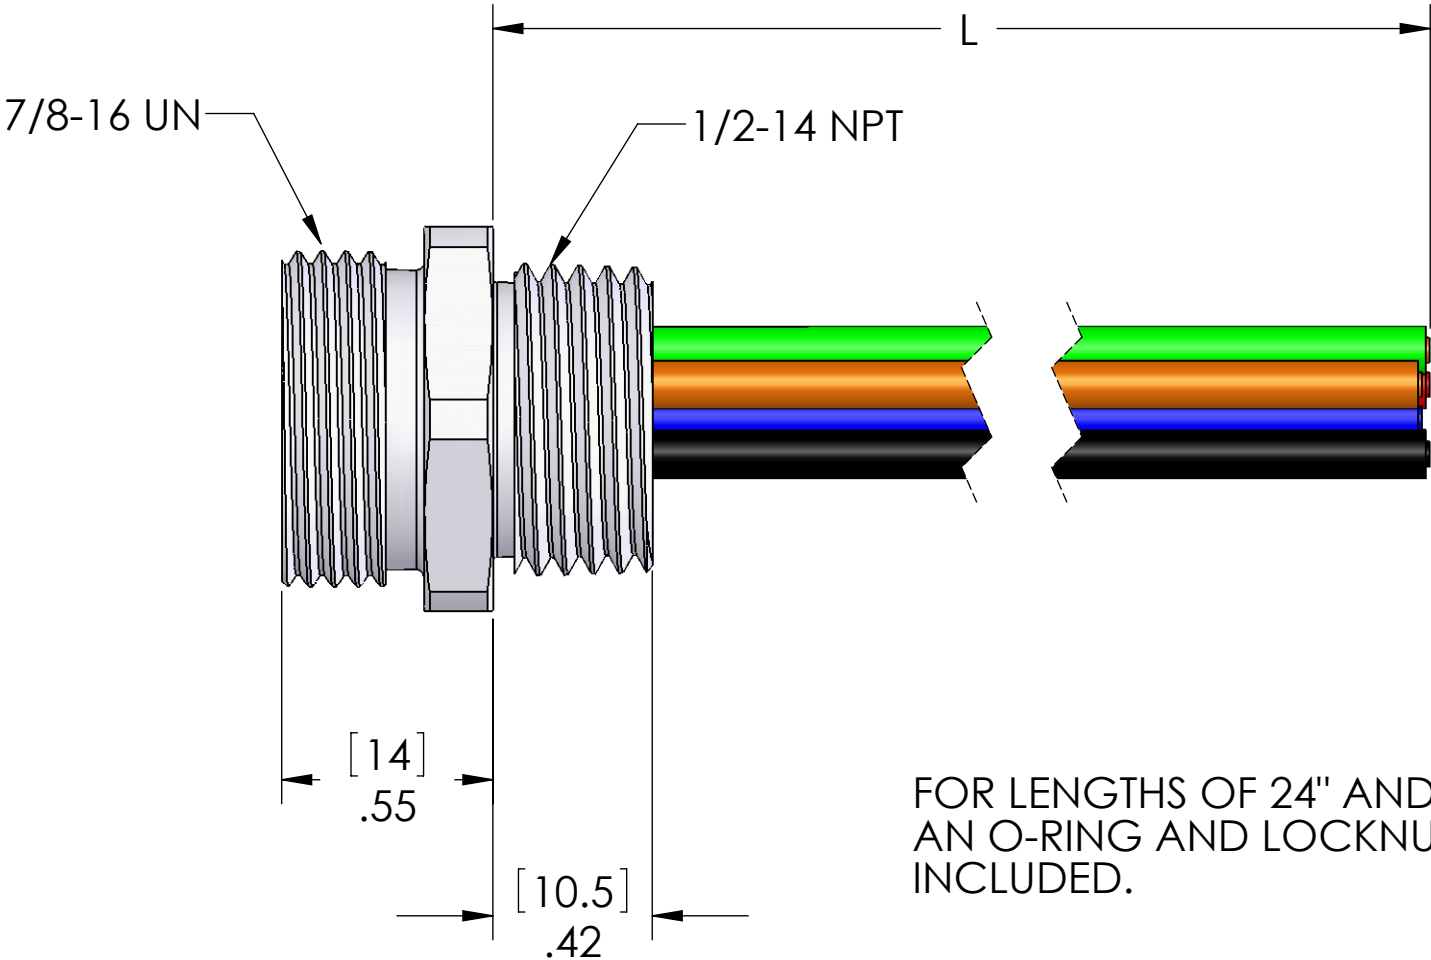


PIN #	COLOR
1	WHITE
2	RED
3	GREEN / YELLOW
4	ORANGE
5	BLACK
6	BLUE

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	7/29/2005	

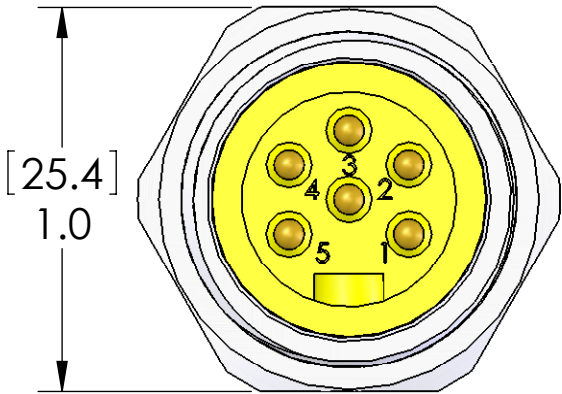

FOR LENGTHS OF 24" AND LONGER
AN O-RING AND LOCKNUT ARE
INCLUDED.

P/N	L
MIN-6MR-.5	6"
MIN-6MR-1	12"
MIN-6MR-2	24"
MIN-6MR-3	36"
MIN-6MR-4	48"
MIN-6MR-5	60"
MIN-6MR-6	72"
MIN-6MR-8	96"
MIN-6MR-10	120"
MIN-6MR-15	180"
MIN-6MR-20	240"

MATERIALS	
BODY:	CLEAR ANODIZED ALUMINUM
CONTACTS:	GOLD PLATED COPPER ALLOY
INSERT:	YELLOW PVC
WIRE:	16AWG UL1015

APPROVALS	
U.S.	UL RECOGNIZED
CANADA	C-UL RECOGNIZED

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS	600V
AMPS	8A
TEMP	105°C
SPECIFICATIONS	

UNLESS OTHERWISE SPECIFIED:		NAME	MENCOM CORPORATION	
DIMENSIONS ARE IN INCHES AND [MM]	DRAWN	DWM		
	CHECKED			
	ENG APPR.			
	MFG APPR.			
	Q.A.			
MATERIAL	COMMENTS:		TITLE:	
FINISH				
DO NOT SCALE DRAWING				

SIZE	DWG. NO.	REV
B	MIN-6MR-ZZ	A
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1