



MIN Series Size II Cordsets


North American Color Code ❖ PVC Cable ❖ 18 AWG 300V Plugs

Face View of Male	# of Poles	Color Code	Wire AWG Rating	Length	Female Plugs		Male Plugs
					Straight	Right Angle	Straight
	6	1-Orange 2-Blue 3-Black 4-White 5-Red 6-Green/Yellow	18 300V 5.5A	3 FT 6 FT 12 FT 20 FT 30 FT	MIN-6FPX2-3 MIN-6FPX2-6 MIN-6FPX2-12 MIN-6FPX2-20 MIN-6FPX2-30	MIN-6FPX2-3-R MIN-6FPX2-6-R MIN-6FPX2-12-R MIN-6FPX2-20-R MIN-6FPX2-30-R	MIN-6MPX2-3 MIN-6MPX2-6 MIN-6MPX2-12 MIN-6MPX2-20 MIN-6MPX2-30
	7	1-White w/ Black 2-Black 3-White 4-Red 5-Orange 6-Blue 7-Green/Yellow	18 300V 5A	3 FT 6 FT 12 FT 20 FT 30 FT	MIN-7FPX-3 MIN-7FPX-6 MIN-7FPX-12 MIN-7FPX-20 MIN-7FPX-30	MIN-7FPX-3-R MIN-7FPX-6-R MIN-7FPX-12-R MIN-7FPX-20-R MIN-7FPX-30-R	MIN-7MPX-3 MIN-7MPX-6 MIN-7MPX-12 MIN-7MPX-20 MIN-7MPX-30
	8	1-Orange 2-Blue 3-White w/ Black 4-Black 5-White 6-Red 7-Green/Yellow 8-Red w/ Black	18 300V 5A	3 FT 6 FT 12 FT 20 FT 30 FT	MIN-8FPX-3 MIN-8FPX-6 MIN-8FPX-12 MIN-8FPX-20 MIN-8FPX-30	MIN-8FPX-3-R MIN-8FPX-6-R MIN-8FPX-12-R MIN-8FPX-20-R MIN-8FPX-30-R	MIN-8MPX-3 MIN-8MPX-6 MIN-8MPX-12 MIN-8MPX-20 MIN-8MPX-30


For Stainless Steel coupling nut on straight cordsets, add a “-SS” suffix (e.g. MIN-6FPX2-6 becomes MIN-6FPX2-6-SS). Please consult the factory for Stainless Steel right angle cordsets. 16 AWG 600V cable is available for the 6 pole versions, please consult factory.

Specifications:

Body: Oil Resistant Yellow PVC
 Contacts: Copper Alloy with Gold Plating
 Coupling Nut: Clear Anodized Aluminum
 Cable: Oil Resistant Yellow PVC Jacket,
 Rated at 300V, 105°C, Non-Wicking,
 Non-Hygroscopic, AWM Style 2661
 Conductors: 18 AWG Bare Copper, PVC Insulated
 Temperature: -40°C to +105°C (-40°F to +221°F)
 Protection: IP 67
 Approvals: U.S.: UL Recognized
 Canada: C-UL Recognized

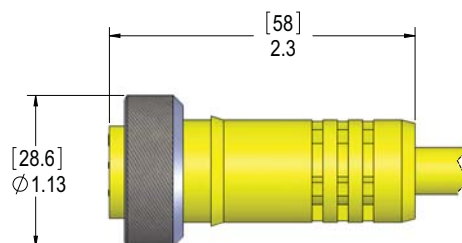

Straight Plug

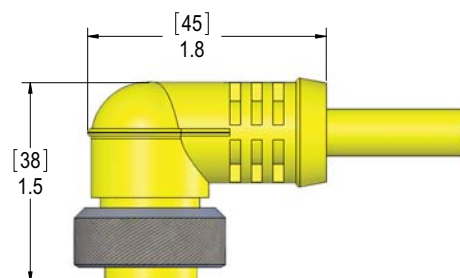

Right Angle Plug

