

MT5C/8C Ø56mm / Ø85mm Steady & Flashing with Buzzer

TOWER LIGHTS



Incandescent or **LED**

- Optional LED bulbs available
- Selectable Steady or Flashing Modes
- Prism-cut lenses for even light distribution
- Surface, Pole or Wall Mounted (Order poles & bases separately)
- Wire leads or Terminal connection
- Add-on Buzzer (80 dB) kit available
- NEMA 12, 3R / IP56 rated



Order Information

MT	5	C	5	A	L	-	RYGBC
	①	②	③	④	⑤		⑥

① Lens Diameter	5	Ø56mm
	8	Ø85mm
② Light Style	C	Steady & Flashing
③ Number of Stacks	1	1 Light
	2	2 Lights
	3	3 Lights
	4	4 Lights
	5	5 Lights
④ Power Supply	A	DC/AC 24V
	B	AC 110~120V
	C	AC 220~240V
⑤ Connection	L	Lead Wires
	T	Screw Terminals
⑥ Lens Colors (top to bottom)	R	Red
	Y	Yellow
	G	Green
	B	Blue
	C	Clear

Optional Orders

Buzzer Kits

*Note: Max. number of tier including Buzzer is 5.

MPZ - 56 A

Power Supply	
A	DC/AC 24V, 80dB (30mA)
B	AC 110~120V, 80dB (30mA)
C	AC 220~240V, 80dB (30mA)
Buzzer Size (Diameter)	
56	Ø56mm (for MT5C Series)
85	Ø85mm (for MT8C Series)


Replacement Parts

LED		LED-T15-D-24-(□)	DC 24V
		LED-T15-D-110-(□)	AC 110~120V
		LED-T15-D-220-(□)	AC 220~240V
BULB		MAB-T15-D-024-10	DC/AC 24V, 10W
		MAB-T15-D-120-10	AC 110~120V, 10W
		MAB-T15-D-240-10	AC 220~240V, 10W
Lens	—	MAL-5(□)	Ø56mm
		MAL-8(□)	Ø85mm

(□): indicates color of LED or Lens; R, Y, G, B or C

Specifications

Power Supply		24V AC/DC	110~120V AC	220~240V AC
Current Draw	Bulb	1 Stack	0.4 A	0.08 A
		2 Stack	0.8 A	0.08 A
		3 Stack	1.2 A	0.12 A
		4 Stack	1.6 A	0.16 A
		5 Stack	2.0 A	0.2 A
	LED	Per Stack	180 mA	35 mA
Buzzer		30 mA		
LED Life-Span		10,000 hours (minimum)		
Sound Level		80 dB		
Flashing rate		80 times/minute		
Rating		NEMA 12, 3R / IP 56		
Approvals		UL, cUL, CE		




Symbol	Model	
	MT5C	MT8C
A	29	29
B	185	185
C	95	108
*T	173	188
D	56	85
E	15	15
1	68	68
2	136	136
3	204	204
4	272	272
5	340	340

*T: Terminal board style

unit: mm

Buzzer Kit

MPZ-56
MPZ-85



Symbol	MPZ-56	MPZ-85
A	56	86
B	48	50
C	54	56

See Page 13-14
for Mounting Options and Accessories

MT5C/8C & MT4B/5B/8B Wiring Diagram


MT5C/8C

DC/AC 24V


Steady or Flashing (with Buzzer)

MT5C□AL-□□□□ MT8C□AL-□□□□

MT5C□AT-□□□□ MT8C□AT-□□□□

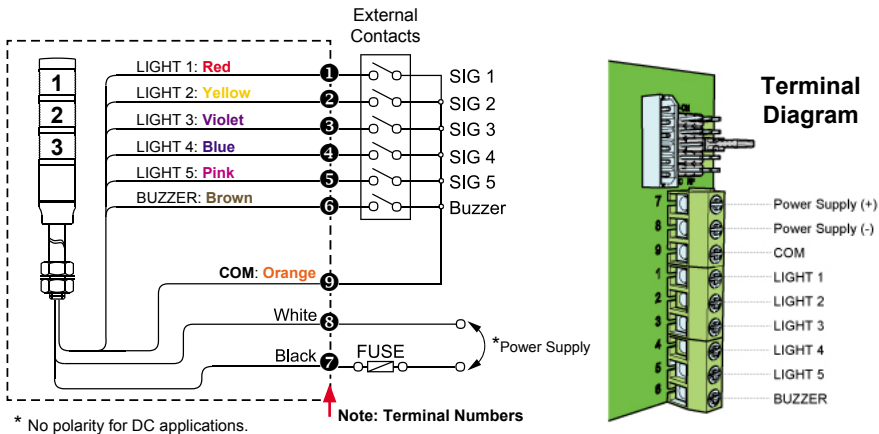

Steady/Flashing Selection

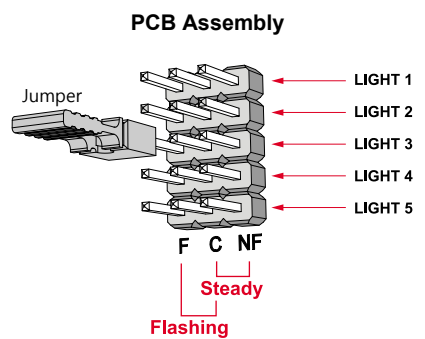

AC 110~120V
AC 220~240V



Steady or Flashing Lights (with Buzzer)

MT5C□BL-□□□□ MT8C□BL-□□□□

MT5C□BT-□□□□ MT8C□BT-□□□□

MT5C□CL-□□□□ MT8C□CL-□□□□


MT5C□CT-□□□□ MT8C□CT-□□□□

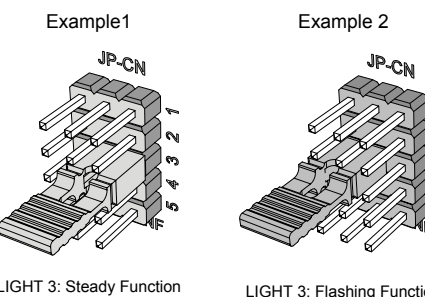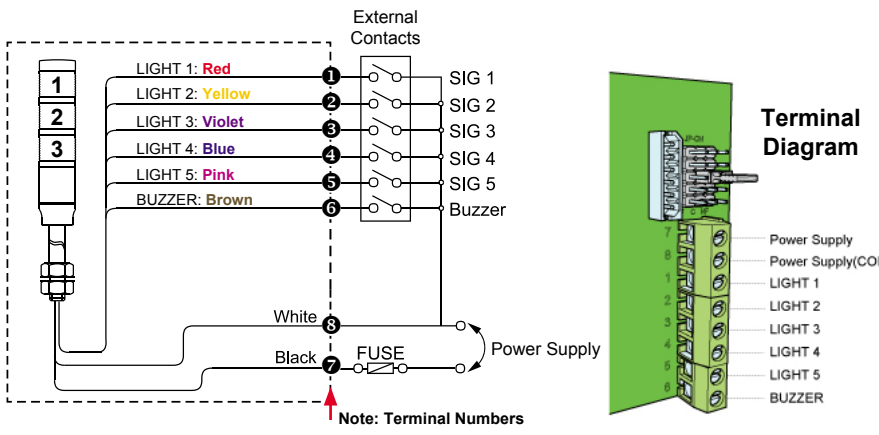

MT4B/5B/8B

AC/DC 12V AC 110~120V
AC/DC 24V AC 220~240V


Steady Lights

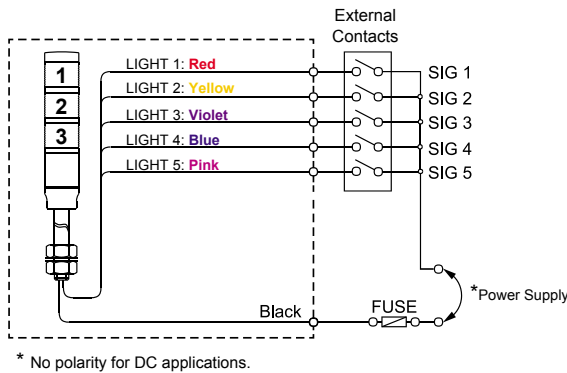

Pole Mounting with Base


Part	Part #	Description
1	*MAP-0022	Ø20mm, 0.87 in (22 mm) pole
	MAP-0240	Ø20mm, 9.45 in (240 mm) pole
	MAP-0750	Ø20mm, 29.53 in (750 mm) pole
	MAP-1000	Ø20mm, 39.37 in (1000 mm) pole
2	MAM-B070	Ø70mm Plastic Base
	MAM-B070D	Ø70mm Plastic Base with Water-Proof Rubber Gasket
	MAM-B070R	Ø70mm Plastic Base with 180° rotating pole holder
	MAM-B090	Ø90mm Plastic Base
3	MAP-M043	Ø20mm, 1.69 in (43 mm) threaded pole with 1 nut
	MAP-M240	Ø20mm, 9.45 in (240 mm) threaded pole with 2 nuts
	MAP-M750	Ø20mm, 29.53 in (750 mm) threaded pole with 1 nut
4	MAM-DS23-20	Aluminum Base

* MAM-0022 CANNOT be used with PTE & PTM Series.

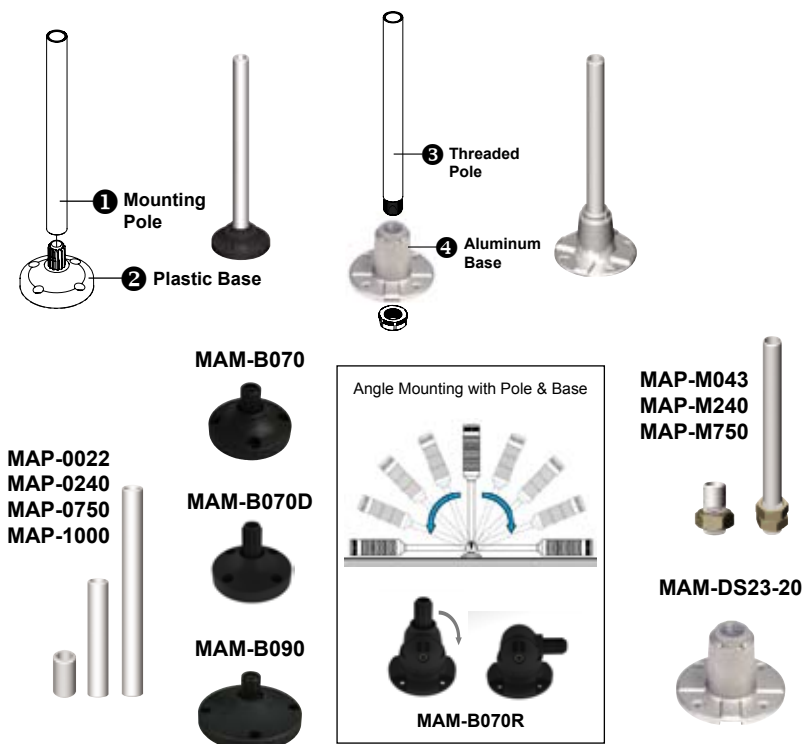

L-angle Mounting with Bracket


Part	Part #	Description
3	MAP-M043	Ø20mm, 1.69 in (43 mm) threaded pole with 1 nut
	MAP-M240	Ø20mm, 9.45 in (240 mm) threaded pole with 2 nuts
	MAP-M750	Ø20mm, 29.53 in (750 mm) threaded pole with 1 nut
5	MAM-DS25	L-angle Bracket

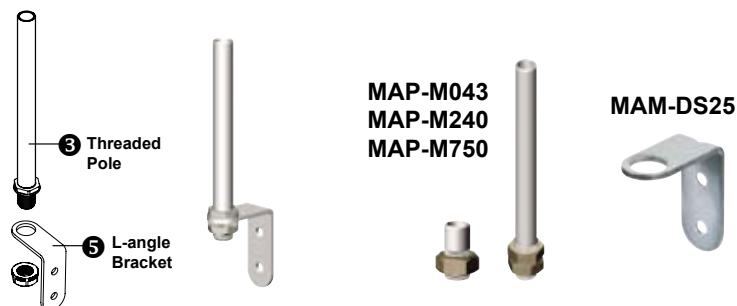

Wall Mounting with Bracket

Part	Part #	Description
1	*MAP-0022	Ø20mm, 0.87 in (22 mm) pole
	MAP-0240	Ø20mm, 9.45 in (240 mm) pole
	MAP-0750	Ø20mm, 29.53 in (750 mm) pole
	MAP-1000	Ø20mm, 39.37 in (1000 mm) pole
2	MAM-B070	Ø70mm Plastic Base
	MAM-B070D	Ø70mm Plastic Base with Water-Proof Rubber Gasket
6	MAP-DS30-BLK	Plastic Wall Mounting Bracket, Black (Pole & Base required)
	MAP-DS30-BGE	Plastic Wall Mounting Bracket, Beige (Pole & Base required)
	MAP-DS40-BLK	Plastic Wall Mounting Bracket, Black (Pole required)
	MAP-DS40-BGE	Plastic Wall Mounting Bracket, Beige (Pole required)
	MAM-DS28	Metal Wall Mounting Bracket (Pole & Base required)

* MAM-0022 CANNOT be used with PTE & PTM Series.

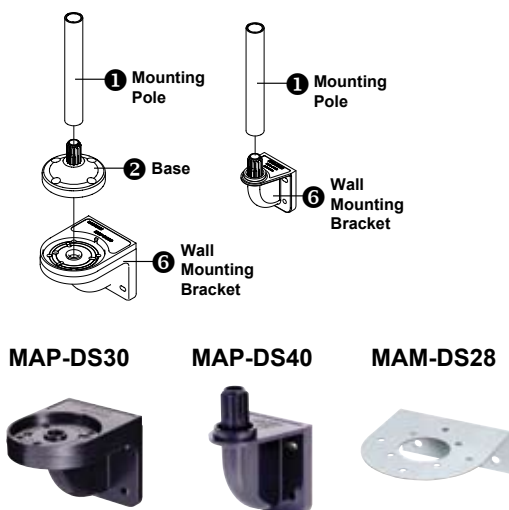

NPT Mounting with NPT Adaptor




MAP-NPT1/2

Accessories


Mounting Poles

MAP-0022
MAP-0240
MAP-0750
MAP-1000

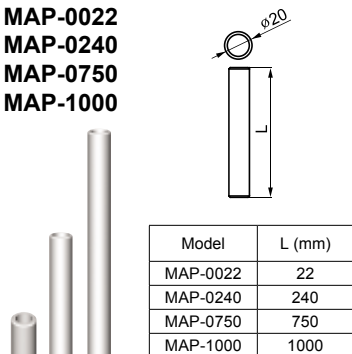


Threaded Poles

MAP-M043



MAP-M240
MAP-M750



Model	L (mm)
MAP-M240	240
MAP-M750	750


NPT Adaptor

MAP-NPT1/2




Mounting Bases


MAM-B070




MAM-B070D




MAM-B090



MAM-B070R


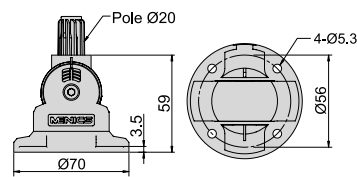


MAM-DS23-20




Wall Mount Brackets


MAM-DS25




MAP-DS30




MAP-DS40



MAM-DS26



MAM-DS27



MAM-DS28

