


TOWER LIGHTS

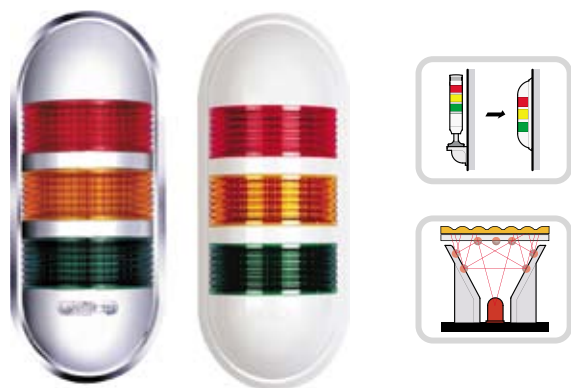

- Slim Profile Wall Mount
- Easy Mounted vertically and horizontally
- Equivalent brightness in every angle
- Steady and flashing lights
- Vibration and moisture resistant
- Chrome or tan colored body

Order Information


PWE	C	F	-	3	02	-	RYG
①	②	③		④			⑤

① Housing Color		Cream
	C	Chrome
② Light Style		Steady
	F	Steady & Flashing
	B	Steady with Buzzer
	Z	Steady & Flashing with Buzzer
③ Number of Stacks	1	1 Light
	2	2 Lights
	3	3 Lights
④ Power Supply	02	DC/AC 24V
	FF	AC 90~240V
⑤ Lens Colors (top to bottom)	R	Red
	Y	Yellow
	G	Green

Specifications

Power Supply		24V AC/DC	90~240V AC
Current Draw	1 Stack	28 mA	30 mA
	2 Stack	63 mA	65 mA
	3 Stack	103 mA	100 mA
Sound Level		85 dB	
Flashing rate		80 times/minute	
Rating		IP 65/ IP 56 with Buzzer	

Dimensions

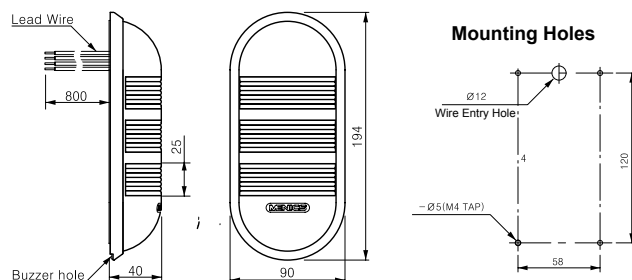


Wiring Diagram

DC/AC 24V

Steady Lights (with Buzzer)


PWE-□02-□□□ PWEB-□02-□□□

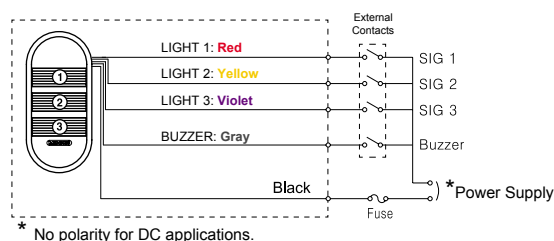

AC 90~240V

Steady Lights (with Buzzer)

PWE-□FF-□□□ PWEB-□FF-□□□

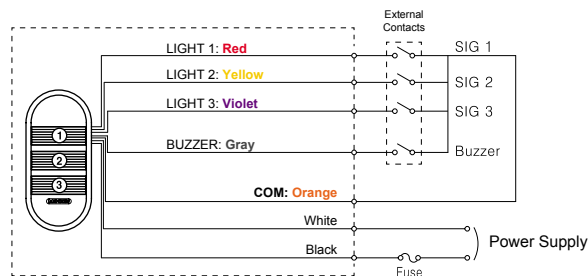

AC 90~240V

DC/AC 24V

Steady & Flashing Lights (with Buzzer)

PWEF-□02-□□□

PWEZ-□02-□□□

PWEF-□FF-□□□

