

TFVM250 Series

Pilot Type Foot Valve




TFVM250

Symbol



How to order



1 Foot valve

2 Number of port
50 : 5 ports

3 Threads

Blank : Rc(PT)
N : NPT
G : G(PF)



4 Port size

02 : 1/4
03 : 3/8

Standard specifications

Type	TFVM250-02	TFVM250-03
Fluid	Air	
Operating pressure range	0~10bar (0~1MPa)	
Ambient and fluid temperature	-5 ~60°C (Anti-freezing)	
Effective section area(Cv)	19mm ² (1.0)	45mm ² (2.4)
Lubrication	Not necessary(Turbine oil 1 class / ISO VG32 can be lubricated)	
Port size	1/4	3/8

Dimension(mm)

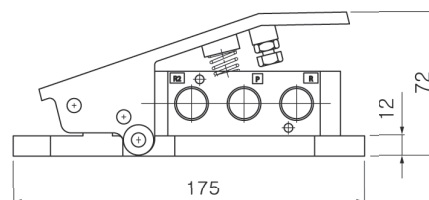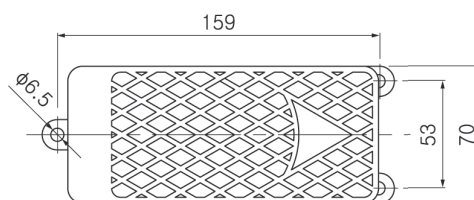

- TAMG
- T AFL
- TAM
- TAMD
- TAMH
- TAMU
- PC 8
- PC 9
- PF 8
- PF 9
- PR 8
- PR 9
- PL 8
- PL 9
- PER1
- PER2
- TFVM**
- TRJ
- NGQ
- AQ2
- AQ3
- AMRBR
- DV 4000
- DR 100