
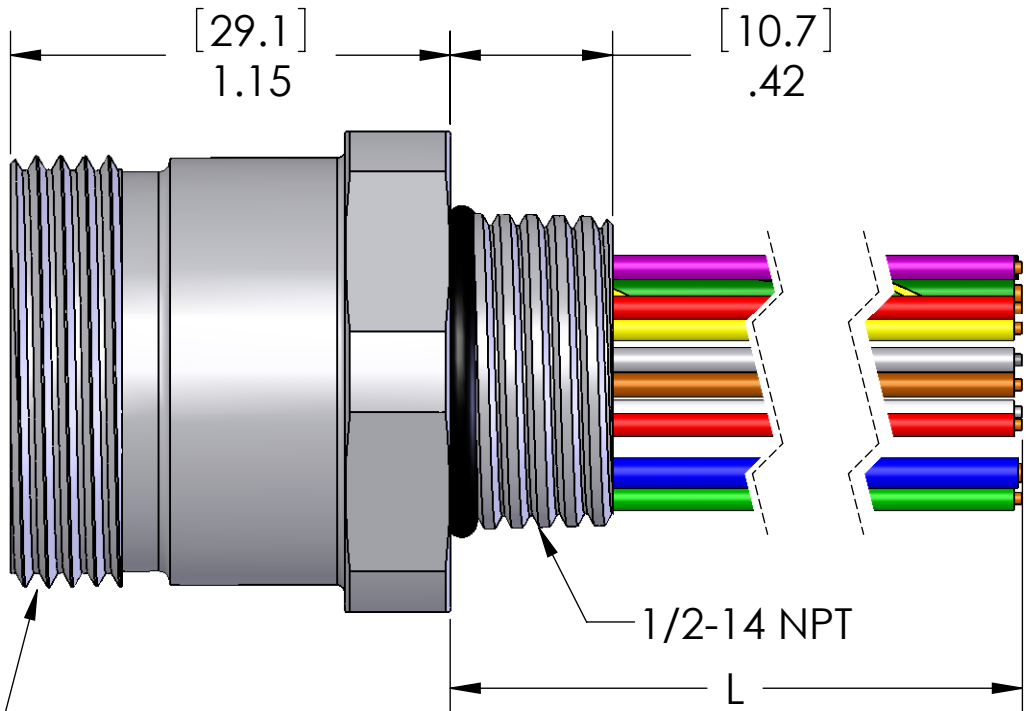


8		7		6	
PIN #	COLOR			PIN #	COLOR
1	VIOLET			11	BLACK
2	RED			12	GREEN/YELLOW
3	GRAY			13	YELLOW w/BROWN
4	RED w/BLUE			14	BROWN w/GREEN
5	BLUE			15	WHITE
6	GREEN			16	YELLOW
7	BROWN			17	PINK
8	WHITE w/GREEN			18	GRAY w/BROWN
9	WHITE w/YELLOW			19	GRAY w/PINK
10	WHITE w/GRAY				

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	6/6/2005	
B	CORRECTED DRAWING	2/14/2011	

PINS 5, 7 & 12 ARE 18AWG

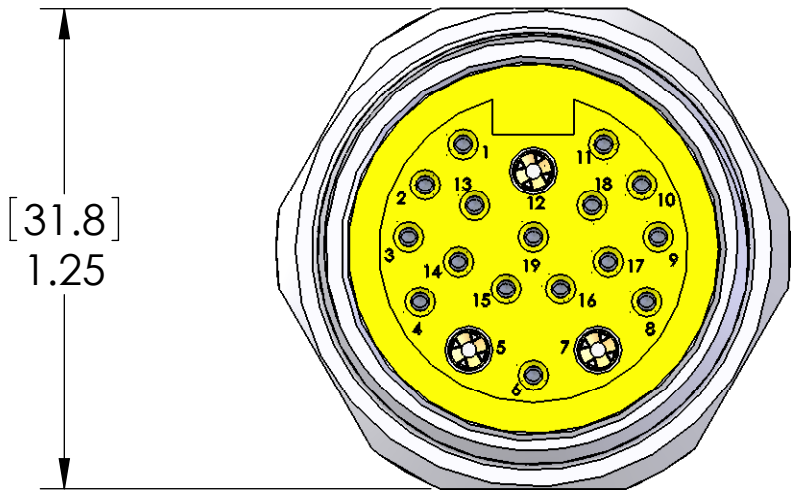

1.125-16 UN2A

TABLE A

P/N	L
MIN-19FR-1	12" [0.3m]
MIN-19FR-2	24" [0.6m]
MIN-19FR-3	36" [0.9m]
MIN-19FR-4	48" [1.2m]
MIN-19FR-6	72" [1.8m]
MIN-19FR-10	120" [3.1m]
MIN-19FR-15	180" [4.6m]
MIN-19FR-20	240" [6.1m]

MATERIALS	
BODY:	CLEAR ANODIZED ALUMINUM
CONTACTS:	GOLD PLATED COPPER ALLOY
INSERT:	YELLOW PVC
WIRE:	18AWG & 22AWG UL1007
O-RING:	NBR
LOCK-NUT:	ZINC PLATED STEEL

FOR LENGTHS OF 24" AND LONGER,
OUR 212M LOCK-NUT IS INCLUDED

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS	300V
AMPS	10A & 2A
TEMP	105°C

SPECIFICATIONS

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES
AND [MM]

MATERIAL

FINISH

DO NOT SCALE DRAWING

NAME	
BEM	
DRAWN	
CHECKED	
ENG APPR.	
MFG APPR.	
Q.A.	
COMMENTS:	

MENCOM CORPORATION

TITLE:

SIZE	DWG. NO.	REV
B	MIN-19FR-ZZ	B

SCALE: 2:1 WEIGHT: SHEET 1 OF 1